

HW65A

Wheeled excavator



Head Office(Sales Office)
11F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

PLEASE CONTACT

2025. FEB

Gross Power
48.5 kW (65.9 hp) at 2400 rpm

Bucket Capacity
0.07 to 0.18 m³

Operating Weight
6065 to 6485 kg




PRODUCTIVITY & PERFORMANCE

The highly efficient Stage V HD Hyundai engine enhances fuel efficiency yet still offers industry-leading performance, along with low noise and vibration. And thanks to its optimised design and counterweight, the HW65A has the best work stability in its class.

Greater efficiency

The new HD Hyundai engine increases fuel efficiency by 6% compared to the previous model, while having the highest torque in its class. And with a DOC + DPF installed, it doesn't need any extra additives.

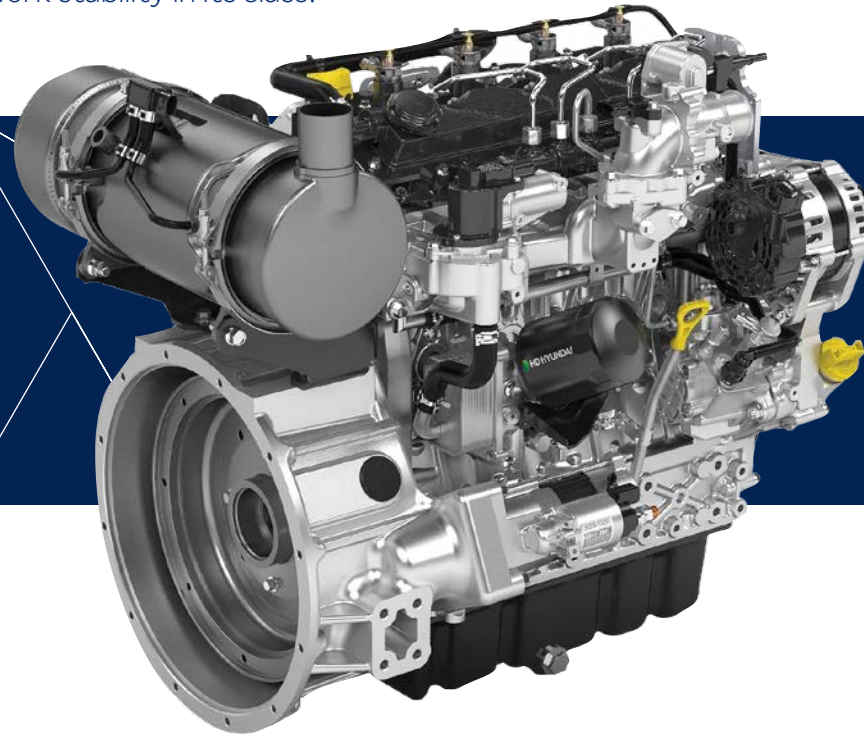

The high-powered Stage V HD Hyundai DM02V engine delivers 66 HP and peak torque of 248 Nm.



Optimal counterweight

Lifting force has been increased massively by installing a heavy counterweight. It also enables the best working stability in its class.

Improved engine cowl air vent

Increasing the vent hole of the engine cowl by 76% has improved engine cooling and durability and reduced noise.

Reinforced bushing application

Durability is enhanced by applying dimple bushing to the boom pin area.

Complete durability

A double layer air cleaner blocks dust from the engine, which optimises the air filter replacement and the engine's durability.

A 4-way hydraulic line provides greater versatility for the operator allowing a greater use of attachments.



 **6%**
INCREASED
FUEL EFFICIENCY

Built for tough working

The HW65A is designed to withstand harsh treatment, dozer, boom and engine hood guarding give extra protection.

Double tyre option


The HW65A has a double tyre option that gives the machine greater stability. And with a maximum width of 2,100mm, the double tyre option still allows the machine to be transported easily.

Optimal hydraulic pipeline layout

The hydraulic pipes are placed at the top of the boom to prevent damage when working in narrow trenches.

Seamless performance

By designing everything in-house, HD Hyundai has created the perfect synergy between engine and machine, with reduced noise and vibration enhancing operator comfort.

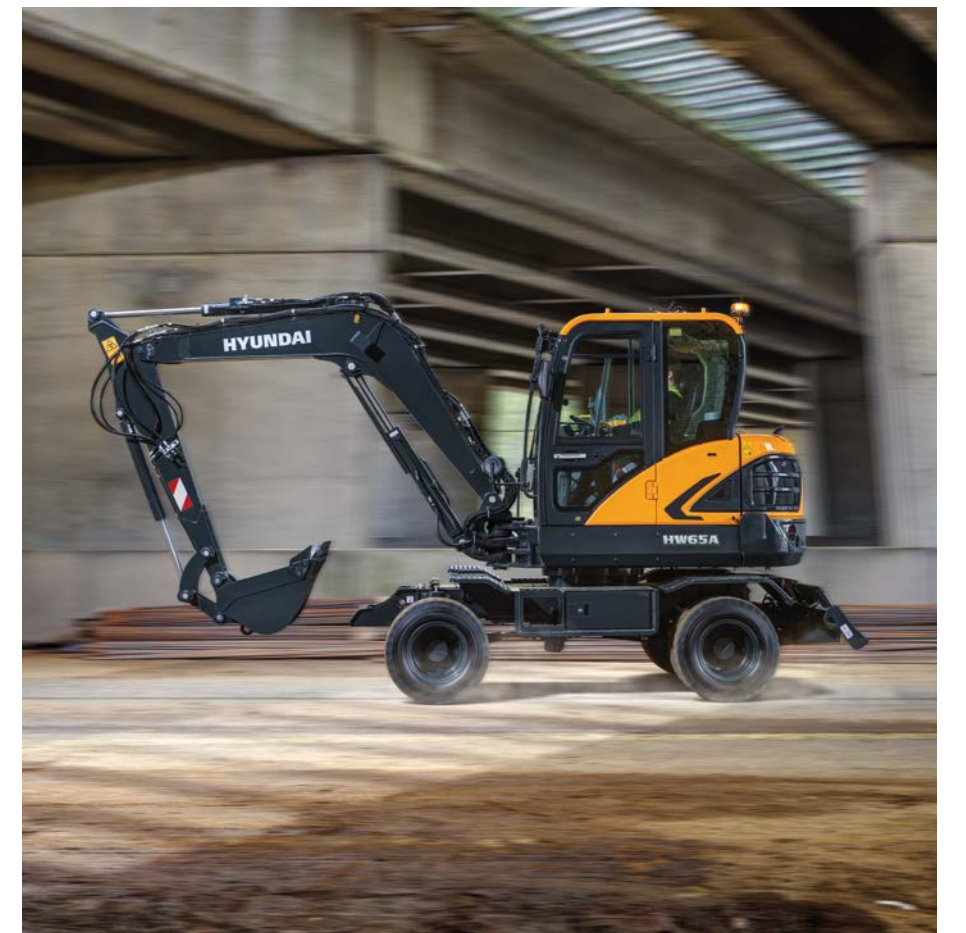

COMFORT & EASE OF USE

In the new HW65A, comfort and efficiency go hand in hand. The standard proportional joysticks improve operating while the new 7-inch cluster makes diagnosing your machine as easy as possible. More space, better visibility and enhanced features make sure the operator enjoys a comfortable working environment.

Intelligent & wide cluster

The new layout increases the operator's comfort and productivity thanks to an increase in space, better visibility and new tools.

✓ New 7-inch touchscreen cluster

The new cluster maximises operator productivity by providing integrated, easy access to all necessary information, from the outside temperature to the power modes and hydraulics settings, on a highly readable screen.



☞ Comfort in all weathers

Standard air conditioning has been improved in the front and rear, while a 3-level, adjustable heated seat ensures maximum comfort.

Proportional joysticks A

The proportional joysticks as standard will greatly improve the operability of your machine and your attachments.

Smooth operation

A proven, high-quality RCV (Remote Control Valve) lever has been added to improve operating and let you personalise settings such as attachment control.

Bluetooth Radio B

Conveniently located radio with hands-free audio functions.



☞ Push button start

An innovative machine requires convenient modern functions like the button-type ignition key with start & stop function, plus added USB ports.

SAFETY

HD Hyundai excavators don't just meet the required safety standards, they exceed them. The HW65A includes multiple safety tools as standard like Auto safety locks on boom, arm and dozer blade cylinder, while a rear view camera ensures the safest working environment possible.

Max visibility

Visibility is key while working. That's why the HW65A can be optionally equipped with a rear-view camera.



Rear-view camera for increased safety



LED lamps

For added safety, LED lamps are used in all the worklights with the boom worklights recessed to help prevent damage when working.

Seat belt warning alarm

If the seat belt is not buckled when the ignition key is turned, an alarm is sounded, along with a continuous visual alert.

Auto Safety Lock

The Auto Safety Lock prevents unintended operation due to the excavator not being controlled solely by the RCV lever.



SERVICEABILITY & TELEMATICS

The HW65A is designed to offer simple daily inspections of all major parts and quick, easy maintenance. All parts are accessible from ground level through extra wide opening cowl doors.



Optimal placement of filters

Large engine hood and easy ground level access to daily checks and filters.

Reinforced Bushings

Dimple bushings on the boom pins reinforce durability and extend the grease-period of the machine.

Added Toolbox

Increased storage space with additional toolbox.

Double air cleaners

Dual air cleaners give increased filtration ensuring maximum engine life and long service intervals.

Keeping you covered

HD Hyundai Genuine Parts and accessories are designed to keep your machine running at optimum performance, with 24-hour delivery across our dealer network. HD Hyundai Standard and Extended Warranty Programmes provide peace of mind and give you full control over your operating costs.



Hi MATE

It's convenient, easy and valuable. Hi MATE, HD Hyundai's remote management system, utilises GPS-satellite technology to provide customers with the highest level of service and product support available.

Increase productivity

By providing information such as service hours, idle time and fuel consumption, Hi MATE saves you money and improves productivity. Service alerts enable better maintenance planning.

Monitor your machines

Hi MATE's real-time location information allows convenient monitoring of your equipment via the Hi MATE website or mobile app.

Improve Security

Protect your equipment from theft or unauthorised usage. Hi MATE's geofencing alerts notify you automatically when a machine leaves a predetermined zone.

Mobile fleet app

Our new mobile app provides all the information you need to run your equipment more efficiently and economically. It has been optimised for fleet management, providing health insights based on telematic technology to keep your machines working at maximum performance.



HW65A

SPECIFICATIONS

ENGINE	
Maker / Model	HYUNDAI / DM02VB (D24)
Type	4-cycle, turbocharged, intercooled, electronic controlled diesel engine
Gross Power @ 2400 rpm	48.5 kW (65.9 hp)
Net Power @ 2400 rpm	47 kW (63.9 hp)
Max. Power @ 2400 rpm	48.5 kW (65.9 hp)
Peak Torque	248 Nm
Displacement	2,392 ℓ
Starting Motor	12V x 2.5 kW
Alternator	13.5V-90A

HYDRAULIC SYSTEM	
Open Centre hydraulic system with two hydraulic pumps	
MAIN PUMP	
Type	Variable displacement tandem axial piston pumps
Max. flow	2 x 60 l/min
PILOT PUMP	
Type	Two gear pumps (pilot + swing, swivel, dozer)
Max. flow	38.9 + 9.5 l/min

HYDRAULIC MOTORS		
Travel		Variable displacement axial piston motor
Swing		Axial piston motor with automatic brake
RELIEF VALVE SETTING		
Implement circuits		220 kgf/cm2 (3,130 psi)
Travel		235 kgf/cm² (3,350 psi)
Swing circuit		230 kgf/cm² (3,280 psi)
Pilot circuit		30 kgf/cm² (426 psi)
HYDRAULIC CYLINDERS		
No. of cylinder bore × stroke	boom	1-110 x 715 mm
	Arm	1-90 x 850 mm
	Bucket	1-80 x 660 mm
	Blade	2-110 x 224 mm

DRIVES & BREAKS	
Drive method	Two-speed powershift transmission with 4-wheel hydrostatic drive travel motor and parking brake
Max. drawbar pull	3,042 kgf
Max. travel speed (High / Low)	11 km/h - 32 or 20 km/h
Gradeability	30° (58%)
Parking brake	Multi Wet Disc

CONTROL	
Pilot pressure operated joysticks, steering wheel and foot pedals for effortless operation.	
Pilot control	Two Joysticks with One Safety Lever (LH): Swing and Arm (RH): Boom and Bucket
Engine throttle	Electric, Dial Type

AXLE & WHEELS	
4-wheel drive with differential. Full floating front axle supported by center pin for oscillation. Rear axle fixed on the lower chassis. Oscillation lock (ram lock) function for safe operation.	
Single tyres	12.0 x 16.5-12PR
Twin tyres (standard)	7.00 X 15-16PR

SWING SYSTEM	
Swing motor	Fixed displacement axial piston motor
Swing reduction	2-stage planetary
Swing bearing	Grease-bathed
Swing brake	Multi wet disc
Swing speed	8.3 rpm

CAPACITIES	
	liter
Fuel tank	125
Engine coolant	11
Engine oil	8.6
Swing device	1.5
Front axle	1
Hydraulic system (including tank)	120
Hydraulic tank	70

UNDERCARRIAGE	
Rigid, welded frame, transmission and rear differential protection, heavy duty axles for dual tyres.	
Dozer blade	
Width x height	1,925 x 350 mm
Max. lift height above ground level	430 mm
Max. depth below ground level	154 mm

OPERATING WEIGHT				
Operating weight, including 3000 mm mono boom, SAE heaped 0.18 m ³ bucket, lubricant, coolant, full fuel tank, full hydraulic tank and all standard equipment.				
EQUIPMENT OPTIONS	Operating weight			
Std arm (1.60 m)	●	●		
Long arm (1.90 m)			●	●
Std counterweight (210kg)	●	●		
Additional counterweight (330kg)			●	●
Single tyres	●		●	
Dual tyres		●		●
Machine weight (kg)	6,065	6,355	6,195	6,485

SOUND LEVEL	
Exterior sound level (2000/14/EC - ISO6395:2008) LWA	99 dB (EU only)
Interior sound level (ISO 6395: 2008) LPA	78 dB


AIR CONDITIONING SYSTEM	
The air conditioning system contains fluorinated greenhouse gas refrigerant R134a(Global Warming Potential = 1430). The system contains 0.65 kg of refrigerant representing a CO2 equivalent of 0.93 metric tonnes.	

STEERING SYSTEM	
Hydraulically actuated orbitrol type actuates on front wheels through steering cylinders	
Min. turning radius	5,450 mm (single/twin tyres)

HW65A

DIMENSIONS & WORKING RANGE

HW65A MONO BOOM DIMENSIONS	
3.0 Mono boom, 1.6m, 1.9m Arm, Rear dozer	

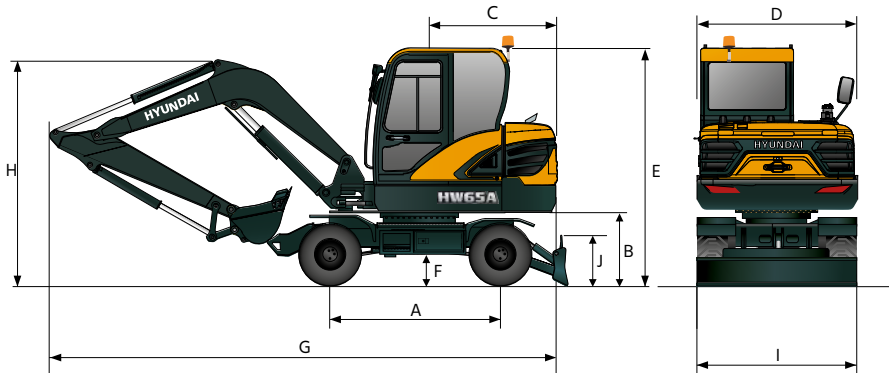


Unit : mm

A	Wheel base	2,100
B	Ground clearance of upper structure	1,000
C	Tail swing radius	1,680
D	Overall width of upper structure	1,925
E	Overall height of cab	2,905
F	Min. Ground clearance	315

	Boom length	3,000	
	Arm length	1,600	1,900
G	Overall length	6,200	6,060
H	Overall height of boom	2,800	3,070
I	Overall width (double tire)	1,925 (2,100)	
J	Height of blade	350	

HW65A WORKING RANGE

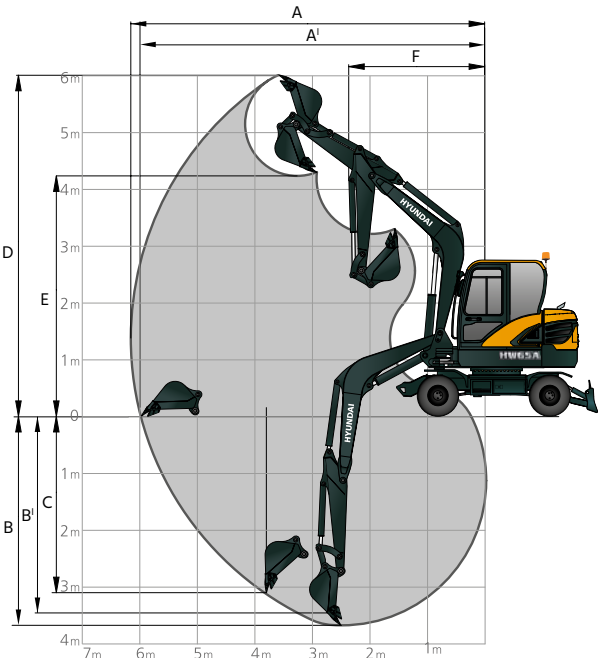

Unit : mm

Boom Length		3,000	
Arm Length		1,600	1,900
A	Max. Digging Reach	6,150	6,450
A'	Max. digging reach (ground)	5,950	6,250
B	Max. digging depth	3,490	3,790
B'	Max. digging depth (8ft level)	31,00	3,440
C	Max. vertical wall digging	3,950	3,320
D	Max. digging height	6,045	6,260
E	Max. dumping height	4,290	4,490
F	Min. swing radius	2,380	2,410











HW65A

























LIFTING CAPACITY





















 Rating over-front  Rating over-side or 360 degree

HW65A

3.0 m boom, 1.6 m arm equipped with 210kg counter weight and double tyres

Lift-point height (m/ft)	Lift-point radius																At max. reach						
	2.0 m				3.0 m				4.0 m				5.0 m				Capacity				Reach m (ft)		
																							
Dozer Blade	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up			
5.0m kg																			*1,310	*1,310	*1,310	*1,310	3.48
4.0m kg									*1,210	*1,210	*1,210	*1,210							*1,270	*1,270	1,190	1,050	4.43
3.0m kg					*1,480	*1,480	*1,480	*1,480	*1,320	*1,320	*1,320	1,220							*1230	*1,230	990	870	4.95
2.0m kg					*2,130	*2,130	2,060	1,790	*1,560	*1,560	1,340	1,170	*1,340	*1,340	960	840			*1,260	*1,260	910	790	5.19
1.0m kg					*2,670	*2,670	1,950	1,680	*1,800	*1,800	1,290	1,130	1,400	1,400	940	820			1,320	1,320	890	780	5.19
0.0m kg	*1,890	*1,890	*1,890	*1,890	*2,820	*2,820	1,900	1,640	*1,920	*1,920	1,260	1,100							1,400	1,400	940	820	4.97
-1.0m kg	*3,690	*3,690	*3,690	3,150	*2,640	*2,640	1,900	1,640	*1,810	*1,810	1,260	1,090							*1,500	*1,500	1,080	950	4.47
-2.0m kg	*3,170	*3,170	*3,170	*3,170	*2,020	*2,020	1,940	1,680											*1,520	*1,520	1,520	1,320	3.56

3.0 m boom, 1.9 m arm equipped with 330kg counter weight and double tyres																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
Lift-point height (m/ft)	Lift-point radius																				At max. reach																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
	1.0 m				2.0 m				3.0 m				4.0 m				5.0 m				Capacity				m (ft)																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																					
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up		Down	Up																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
Dozer Blade																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
5.0m kg																								*1,190	*1,190	*1,190	*1,190	3.94																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
4.0m kg														*1,060	*1,060	*1,060	*1,060									*1,050	*1,050	*1,050	990	4.78																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
3.0m kg														*1,190	*1,190	*1,190	*1,190	*1,180	*1,180	1,040	920					*1,010	*1,010	960	840	5.26																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																
2.0m kg																		*1,910	*1,910	*1,910	*1,910	*1,460	*1,460	1,420	1,250	*1,270	*1,270	1,020	900	*1,030	*1,030	880	780	5.48																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																												
1.0m kg																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														













3.0 m boom, 1.6 m arm equipped with 210kg counter weight and single tyre																						
Lift-point height (m/ft)	Lift-point radius																At max. reach					
	2.0 m				3.0 m				4.0 m				5.0 m				Capacity				Reach	
																					m (ft)	
Dozer Blade	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up		
5.0m	kg																		*1,310	*1,310	*1,310	3.51
4.0m	kg									*1,210	*1,210	*1,210	1,140							*1,270	*1,270	1,100 950 4.45
3.0m	kg					*1,490	*1,490	*1,490	*1,490	*1,320	*1,320	1,290	1,110							*1,230	*1,230	910 790 4.96
2.0m	kg					*2,140	*2,140	1,900	1,620	*1,570	*1,570	1,240	1,060	*1,350	*1,350	890	760			*1,260	*1,260	840 720 5.19
1.0m	kg					*2,670	*2,670	1,790	1,510	*1,810	*1,810	1,190	1020	1,340	1,340	870	740			1,270	1,270	820 700 5.19
0.0m	kg	*1,930	*1,930	*1,930	*1,930	*2,820	*2,820	1,750	1,470	1,840	1,840	1,160	990							1,340	1,340	860 740 4.96
-1.0m	kg	*3,740	*3,740	3,470	2,810	*2,630	*2,630	1,750	1,470	*1,800	*1,800	1,160	990							*1,500	*1,500	1,000 860 4.46
-2.0m	kg	*3,130	*3,130	*3,130	2,880	*2,000	*2,000	1,790	1,510											*1,520	*1,520	1,420 1,210 3.53

1. Lifting capacities are based on ISO 10567.
2. Lifting capacity of the HX A-series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
4. (*) indicates load limited by hydraulic capacity.
5. Caution: please be aware of the local regulations and instructions for lifting operations.

 Rating over-front  Rating over-side or 360 degree

HW65A

3.0 m boom, 1.9 m arm equipped with 330kg counter weight and single tyre

Lift-point height (m/ft)	Lift-point radius																				At max. reach				
	1.0 m				2.0 m				3.0 m				4.0 m				5.0 m				Capacity				m(ft)
																									
	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	Down	Up	
Dozer Blade																									
5.0m kg																									
4.0m kg																									
3.0m kg																									
2.0m kg																									
1.0m kg																									
0.0m kg																									
-1.0m kg	*2,260	*2,260	*2,260	*2,260	*3,220	*3,220	*3,220	2,960	*2,720	*2,720	1,840	1,560	*1,870	*1,870	1,220	1,040									
-2.0m kg	*3,620	*3,620	*3,620	*3,620	*3,640	*3,640	*3,640	3,010	*2,260	*2,260	1,870	1,580													

1. Lifting capacities are based on ISO 10567.
2. Lifting capacity of the HX A-series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm (without bucket mass).
4. (*) indicates load limited by hydraulic capacity.
5. Caution: please be aware of the local regulations and instructions for lifting operations.

HW65A

STANDARD/OPTIONAL EQUIPMENT

● : Standard ○ : Optional

MACHINE AEQUIPMENT	STD/OPT		STD/OPT
Arm 1600 mm	●	Adjustable heatable seat (fabric)	●
Arm 1900 mm (long)	○	Adjustable seat (pvc)	○
Arm safety valves	●	Radio & USB	●
Boom 3000 mm	●	Standard Key	○
Boom safety valves	●	Smart Key + Start Button	●
Quick coupler HD Hyundai	○	Fuel filler pump	○
With control linkage	●	Customized painting	○
Counterweight 210 kg	●	Boom light (LED)	●
Counterweight 330 kg	○	Front + Rear LED working light on cabin	●
Rotation piping prop.	○	Beacon lamp LED	○
Breaker & clamshell piping prop.	●	Rearview camera	○
Quick coupler piping	○	Accumulator	●
Dozer blade safety valve	●	FOG Protection (top)	○
Safety valve on front axle ossillation cylinders	●	FOG Protection (front + top)	○
Twin tyres 7.00 X 15-16PR	●	Hi MATE telematic system	○
Single tyres 12.0 x 16.5-12PR	○	Hydr. oil - VG46	●
Travel motor speed 30 km/h	●	Hydr. oil - tropical region VG68	○
Travel motor speed 20 km/h	○	Hydr. oil - cold region VG32	○
Travel alarm	●	Bio degr. oil Panolin VG 46	○