

## STANDARD EQUIPMENT

ISO Standard cabin
All-weather steel cab with 360° visibility
Safety glass windows
Rise-up type windshield wiper
Sliding fold-in front window
Sliding side window(LH)
Lockable door
Hot & cool box
Storage compartment & Ashtray
Cabin roof-steel cover
Radio & USB player
12 volt power outlet (24V DC to 12V DC converter)
Computer aided power optimization (New CAPO) system
3-power mode, 2-work mode, User mode
Auto deceleration & one-touch deceleration system
Auto warm-up system
Auto overheat prevention system
Automatic climate control
Air conditioner & heater
Defroster
Self-diagnostics system
Starting Aid (air grid heater) for cold weather
Centralized monitoring
LCD display
Engine speed or Trip meter/Accel.
Clock
Gauges
Fuel level gauge
Engine coolant temperature gauge
Hyd. oil temperature gauge
Warnings
Overload
Communication error
Low battery
Air cleaner clogging
Indicators
Max power
Low speed/High speed
Fuel warmer
Auto idle
Door and cab locks, one key
Two outside rearview mirrors
Fully adjustable suspension seat with seat belt
Pilot-operated slidable joystick
Six front working lights (4 boom mounted, 2 front frame mounted)
Electric horn
Batteries (2 x 12V x 160 AH)
Battery master switch
Removable clean-out dust net for cooler
Automatic swing brake
Removable reservoir tank
Fuel pre-filter
Boom holding system
Arm holding system
Track shoes (600mm, 24")
Track rail guard
Accumulator for lowering work equipment
Electric transducer
Lower frame under cover (Normal)

## OPTIONAL EQUIPMENT

Fuel filler pump (35 L/min)
Beacon lamp
Single-acting piping kit (breaker, etc.)
Double-acting piping kit (clamshell, etc.)
Quick coupler
Travel alarm
Booms
6.15 m, 20' 2"
6.5 m, 21' 4"
6.5 m, 21' 4" Heavy Duty
8.6 m, 28' 3"
Arms
2.5 m, 8' 2"
3.2 m, 10' 6"
3.2 m, 10' 6" Heavy Duty
3.9 m, 12' 10"
4.3 m, 14' 1"
5.1 m, 16' 9"
Climate control
Air conditioner only
Heater only
Cabin FOPS (ISO 10262 Level II)
FOPS (Falling Object Protective Structure)
Cabin lights
Cabin front window rain guard
Sun visor
Track shoes
Double grousers shoe (600mm, 24")
Double grousers shoe (700mm, 28")
Triple grousers shoe (700mm, 28")
Triple grousers shoe (750mm, 30")
Triple grousers shoe (800mm, 32")
Triple grousers shoe (900mm, 36")
Triple grousers shoe, heavy duty (600mm, 24")
Triple grousers shoe, heavy duty (700mm, 28")
Full track rail guard
Lower frame under cover (Additional)
Pre-heating system, coolant
Operator suit
Tool kit
Seat
Mechanical suspension seat with heater
Hi-mate (Remote Management System)
Fuel warmer
Air compressor
Rear work lamp

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information. The machine may vary according to International standards.  
 \* The photos may include attachments and optional equipment that are not available in your area.  
 \* Materials and specifications are subject to change without advance notice.  
 \* All imperial measurements rounded off to the nearest pound or inch.



Head Office(Sales Office)  
 14F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

# Robex 430 LC-9SH

With Tier 2 Engine installed



PLEASE CONTACT

# Pride at Work

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality. Take pride in your work with Hyundai!

## Robex 430LC-95H

### Machine Walk-Around

#### Engine Technology

Easy & Simple serviceability  
Low noise / Auto engine warm up feature / Anti-restart feature

#### Hydraulic System Improvements

New patented hydraulic control for improved controllability / Improved control valve design for added efficiency and smoother operation / New auto boom and swing priority system for optimum speed / New auto power boost feature for additional power when needed / Improved arm-in and boom-down flow regeneration system for added speed and efficiency

#### Pump Compartment

Industry-leading, powerful, reliable Kawasaki designed, variable volume in-line axial piston pumps  
New compact solenoid block equipped with 3 solenoid valves, 1 EPPR valve, 1 check valve accumulator and pilot filter - controls 2 speed travel, power boost, boom priority, safety lock

#### Enhanced Operator Cab

##### Improved Visibility

Enlarged cab with improved visibility  
Larger right-side glass, now one piece, for better right visibility  
Safety glass windows on all sides - less expensive than (polycarbonate) and won't scratch or fade  
Closeable sunshade for operator convenience / Reduced front window seam for improved operator view

##### Improved Cab Construction

New steel tube construction for added operator safety, protection and durability  
New window open/close mechanism designed with cable and spring lift assist and single latch release

##### Improved Suspension Seat / Console Assembly

Ergonomic joysticks with auxiliary control buttons for attachment use. Now with new sleek styling

##### Advanced 7" Color Cluster

New Color LCD Display with easy to read digital gauges for hydraulic oil temperature, water temperature, and fuel. Simplified design makes adjustment and diagnostics easier. Also, new enhanced features such as rear-view camera are integrated into monitor.  
3 power modes : (P) Power, (S) Standard, (E) Economy, 2 work modes : Dig & Attachment, (U) User mode for operator preference  
Enhanced self-diagnostic features with GPS / satellite technology  
One pump flow or two pump flow for optional attachment is now selectable through the cluster / New anti-theft system with password capability  
Boom speed and arm regeneration are selectable through the monitor.  
Auto power boost is now available - selectable (on/off) through the monitor.  
Powerful air conditioning and heat with auto climate control, 20% more heat and air output than 7 series!  
RMS (Remote Management System) works through GPS/satellite technology to ultimately provide better customer service and support.

#### Undercarriage

Sealed track chain (urethane seals) / Standard track rail guard / Comfortable bolt-on steps  
Large upper roller cut-outs for debris clean-out / Tapered side frames for debris clean-out / Grease-type track tensioner



\*Photo may include optional equipment.

# Preference

Operating a 9S Series is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



\*Photo may include optional equipment.

## Operator Comfort

In 9S Series cabin you can easily adjust the seat, console and armrest settings to best suit your personal operating preferences. Seat and console position can be set together and independent from each other. Other preference settings that add to overall operator comfort include the fully automatic high capacity airconditioning system and the radio / USB player.



## Reduced Stress

Work is stressful enough. Your work environment should be stress free. Hyundai's 9S Series provides improved cab amenities, additional space and a comfortable seat to minimize stress to the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with USB player, AM/FM stereo is perfect for listening to music favorites.



## Operator - Friendly Cluster

The advanced new cluster with 7 inch wide color LCD screen and toggle switch allows the operator to select his personal machine preferences. Power and work mode selection, self diagnostics, optional rear-view camera, maintenance check lists, start-up machine security, and were integrated into the cluster to make the machine more versatile and the operator more productive.



## Wide Cabin with Excellent Visibility

The newly designed cabin was conceived for more space, a wider field of view and operator comfort. Special attention was given to a clear, open and convenient interior with plenty of visibility on the machine surroundings and the job at hand. This well balanced combination of precision aspects put the operator in the perfect position to work safely and securely.



# Precision

Innovative hydraulic system technologies make the 9S series excavator fast, smooth and easy to control.



## Computer Aided Power

The engine horsepower and hydraulic horsepower together in unison through the advanced CAPO(Computer Aided Power Optimization) system, flow for the job at hand. Operator can set their own preferences for boom or swing priority, power mode selection and optional work tools at the touch of a button.

The CAPO system also provides complete self diagnostic features and digital gauges for important information like hydraulic oil temperature, water temperatures and fuel level. This system interfaces with multiple sensors placed throughout the hydraulic system as well as the hydraulic flow.

### Power Mode

P (Power Max) mode maximizes machine speed and power for mass production. S (Standard) mode provides a reduced, fixed rpm for optimum performance and improved fuel economy. For maximum fuel savings and improved control, E (Economy) mode provides precise flow based on load demand. Three unique power modes provide the operator with custom power, speed and fuel economy.


### Work Mode

The work mode allows the operator to select single flow attachments like a hydraulic breaker or bi-directional flow attachments like a crusher. Flow settings unique to each attachment can be programmed from within the cluster.

### User Mode

Some jobs require more precise machine settings. Using the versatile U (User) mode, the operator can customize engine speed, pump output, idle speed and other machine settings for the job at hand.

## Improved Hydraulic System

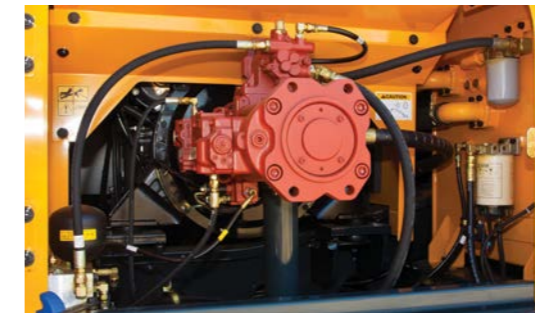


To achieve optimum precision, Hyundai redesigned the hydraulic system to provide the operator with super fine touch and improved controllability. Improved pump flow control reduces flow when controls are not being used to minimize fuel consumption.

Improved spool valves in the control valve are engineered to provide more precise flow to each function with less effort.

Improved hydraulic valves, precision-designed variable volume piston pumps, fine-touch pilot controls, and enhanced travel functions make any operator running a 9S

Series look like a smooth operator. Newly improved features include arm-in and boom-down flow regeneration, improved control valve technology and innovative auto boom and swing priority for optimal performance in any application.

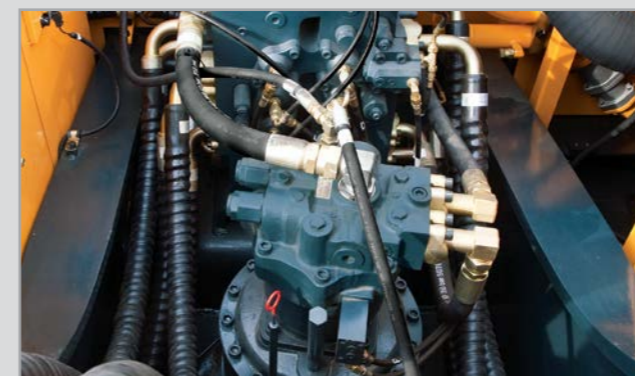

## Auto Boom-swing Priority

This smart function automatically and continuously looks the ideal hydraulic flow balance for the boom and swing motions of the machine. The advanced CAPO system monitors the hydraulic system and adjusts its settings to maximize performance and productivity.

\*Photo may include optional equipment.

# Performance

9S series is designed for maximum performance to keep the operator working productively.



\*Photo may include optional equipment.



## Track Rail Guard & Adjusters

Durable track rail guards keep track links in place. Track adjustment is made easy with standard grease cylinder track adjusters and shock absorbing springs.


## HYUNDAI D6AC-C ENGINE

The six cylinders, 4 cycle, turbo-charged, charger air cooled engine is built for power, reliability, economy and low emissions.

### A More Reliable Way To Reach Your Dream.

When you have a tough job to do, you need power precision and flexibility of Hyundai D6AC-C engine. It is built to withstand the toughest work environment. Bearings have more surface area to handle higher loads with greater durability. Reduced friction in the power cylinder means longer life and increased power output. From the structurally reinforced block to the stiffened gear housing, the D6AC-C is built stronger to last longer.

The D6AC-C engine is capable of reaching Tier 2 emission standards without electronic engine controls. It uses durable mechanical IN-LINE fuel injection system. You get a proven power plant that meets ecological concerns, without paying a premium for technology you don't need.

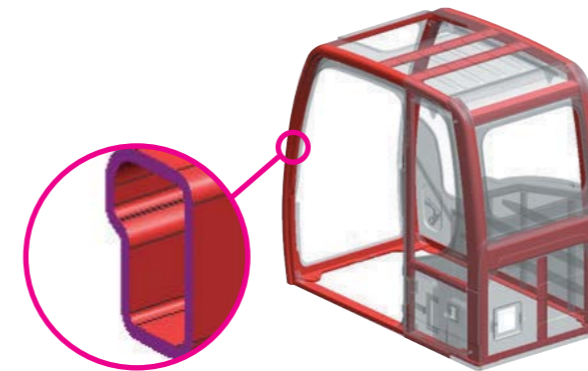

## Structure Strength

The 9S series cabin structure has been fitted with stronger but slimmer tubing for more safety and improved visibility. Low-stress, high strength steel is integrally welded to form a stronger, more durable upper and lower frame. Structural integrity was tested by way of FEM (Finite Elements Method) analysis and long-term durability tests.



# Profitability

9S series is designed to maximize profitability through improved efficiencies, enhanced service features and longer life components.



\*Photo may include optional equipment.


## Fuel Efficiency

9S Series excavators are engineered to be extremely fuel efficient. New innovations like two-stage auto decel system and the new economy mode help to conserve fuel and reduce the impact on the environment.



### Hi-MATE (Remote Management System)

Hi-MATE, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-MATE saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

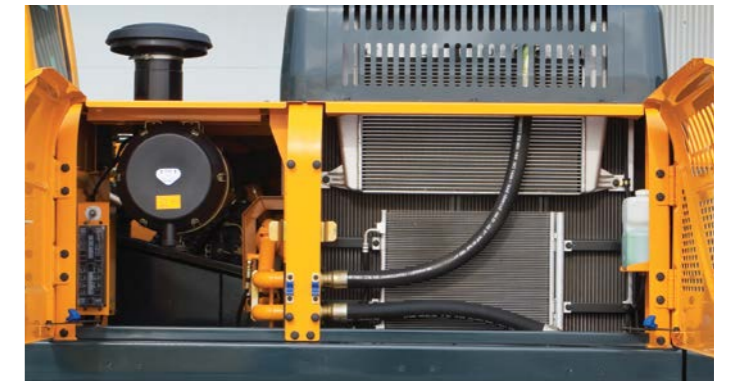

### Easy Access

Ground-line access to filters, lube fittings, fuses, machine computer components and wide open compartments makes service more convenient on the 9S series.



### Long-Life Components

9S series excavators were designed with bushings designed for long-life lube intervals (250 hrs) & polymer shims (wear resistant, noise reducing), long-life hydraulic filters (1,000hrs), long-life hydraulic oil (5,000hrs), more efficient cooling systems and integrated preheating systems which extend service intervals, minimize operating costs and reduce machine down time.

# Specifications

## ENGINE

MODEL	HYUNDAI D6AC-C		
Type	Water cooled, 4 cycle Diesel, 6-cylinders in line, direct injection, turbocharged, charger air cooled, low emission		
Rated flywheel horse power	SAE	J1995 (gross)	276 HP (206 kW) at 1,900 rpm
		J1349 (net)	261 HP (195 kW) at 1,900 rpm
	DIN	6271/1 (gross)	280 PS (206 kW) at 1,900 rpm
		6271/1 (net)	265 PS (195 kW) at 1,900 rpm
Max. torque	120.0kgf.m (868lb.ft)/1,400rpm		
Bore X stroke	130mm X 140mm (9.56" X 10.3")		
Piston displacement	11,149cc (680 in <sup>3</sup> )		
Batteries	2 X 12V X 160AH		
Starting motor	24V, 5.5 kW		
Alternator	24V, 70 Amp		

## HYDRAULIC SYSTEM

<b>MAIN PUMP</b>	
Type	Variable displacement tandem axis piston pumps
Rated flow	2 X 333 L/min (88 US gpm / 73.2 UK gpm)
Sub-pump for pilot circuit	Gear pump
Cross-sensing and fuel saving pump system.	

<b>HYDRAULIC MOTORS</b>	
Travel	Two speed axial pistons motor with brake valve and parking brake
Swing	Axial piston motor with automatic brake

<b>RELIEF VALVE SETTING</b>	
Implement circuits	330 kgf/cm <sup>2</sup> (4,690 psi)
Travel	360 kgf/cm <sup>2</sup> (5,120 psi)
Power boost (boom, arm, bucket)	360 kgf/cm <sup>2</sup> (5,120 psi)
Swing circuit	290 kgf/cm <sup>2</sup> (4,125 psi)
Pilot circuit	40 kgf/cm <sup>2</sup> (569 psi)
Service valve	Installed

<b>HYDRAULIC CYLINDERS</b>	
No. of cylinder bore X stroke	Boom: 2-160 X 1,500 mm (6.3" X 59.1")
	Arm: 1-170 X 1,760 mm (6.7" X 69.3")
	Bucket: 1-150 X 1,295 mm (5.9" X 51.0")

## DRIVES & BRAKES

Drive method	Fully hydrostatic type
Drive motor	Axial piston motor, in-shoe design
Reduction system	Planetary reduction gear
Max. drawbar pull	34,000 kgf (74,960 lbf)
Max. travel speed(high) / (low)	5.1 km/hr (3.5 mph) / 3.3 km/hr (2.2 mph)
Gradeability	35° (70 %)
Parking brake	Multi wet disc

## CONTROL

Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.

Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)
Traveling and steering	Two levers with pedals
Engine throttle	Electric, Dial type

## SWING SYSTEM

Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake	Multi wet disc
Swing speed	9.6 rpm

## COOLANT & LUBRICANT CAPACITY

Refilling	liter	US gal	UK gal
Fuel tank	550	145.3	121.0
Engine coolant	45	13.7	11.4
Engine oil	27.3	7.2	6.0
Swing device-gear oil	8.0	2.1	1.8
Final drive(each)-gear oil	12	3.2	2.6
Hydraulic system(including tank)	410.0	108.3	90.2
Hydraulic tank	210.0	55.5	46.2

## UNDERCARRIAGE

The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets, and a track chain with double or triple grouser shoes.

Center frame	X - leg type
Track frame	Pentagonal box type
No. of shoes on each side	53 EA
No. of carrier roller on each side	2 EA
No. of track roller on each side	9 EA
No. of rail guard on each side	2 EA

## OPERATING WEIGHT (APPROXIMATE)

Operating weight, including 6,500mm (21' 4") H/D boom, 3,200mm (10' 6") H/D arm, SAE heaped 1.9m<sup>3</sup> (2.12 yd<sup>3</sup>) bucket, lubricant, coolant, full fuel tank, full hydraulic tank, and all standard equipments.

<b>MAJOR COMPONENT WEIGHT</b>	
Upperstructure	8,750 kg (19,290 lb)
Boom (with arm cylinder)	3,890 kg (8,330 lb)
Arm (with bucket cylinder)	2,050 kg (4,430 lb)

<b>OPERATING WEIGHT</b>			
Shoes		Operating weight	Ground pressure
Type	Width mm (in)	kg(lb)	kgf/cm <sup>2</sup> (psi)
Triple grouser	600 (24")	42,600 (93,920)	0.74 (10.52)
	700 (28")	43,140 (95,110)	0.64 (9.10)
	750 (30")	43,410 (95,700)	0.60 (8.53)
	800 (32")	43,680 (96,300)	0.57 (8.11)
	900 (36")	44,220 (97,490)	0.51 (7.25)
Triple grouser (Heavy Duty)	600 (24")	43,440 (95,770)	0.75 (10.67)
	700 (28")	44,380 (97,840)	0.66 (9.39)
Double grouser	600 (24")	42,600 (93,920)	0.74 (10.52)
	700 (28")	43,140 (95,110)	0.64 (9.10)

## BUCKETS

All buckets are welded with high-strength steel.

Capacity m <sup>3</sup> (yd <sup>3</sup> )	Width mm (in)	Weight kg (lb)	Tooth EA	Recommendation mm (ft-in)	
				6,500 (21' 4") Boom	
SAE heaped	CECE heaped			2,600 (8' 6") Arm	3,200 (10' 6") Arm
				●	●
Ⓡ 1.90 (2.49)	1.65 (2.16)	1,600 (63")	1,990 (4,390)	5	●
Ⓡ 2.10 (2.75)	1.84 (2.41)	1,735 (68")	2,090 (4,610)	5	■

Ⓡ Rock

Ⓡ 1.90  
2.10



- : Applicable for materials with density of 2,100 kg/m<sup>3</sup> (3,500 lb/yd<sup>3</sup>) or less
- ⦿ : Applicable for materials with density of 1,800 kg/m<sup>3</sup> (3,000 lb/yd<sup>3</sup>) or less
- : Applicable for materials with density of 1,500 kg/m<sup>3</sup> (2,500 lb/yd<sup>3</sup>) or less
- ▣ : Applicable for materials with density of 1,200 kg/m<sup>3</sup> (2,000 lb/yd<sup>3</sup>) or less
- ▲ : Applicable for materials with density of 900 kg/m<sup>3</sup> (1,500 lb/yd<sup>3</sup>) or less
- : Not Recommended

## ATTACHMENT

Booms and arms are welded, a low-stress, full-box section design. 6.5m, 2.6m booms and 6.5m, 3.2m arms are available.

## DIGGING FORCE


Boom	Length	mm (ft-in)	6,500 (21' 4")		Remarks
	Weight	kg (lb)	3,780 (8,330)		
Arm	Length	mm (ft-in)	2,600 (8' 6")	3,200 (10' 6")	
	Weight	kg (lb)	1,990 (4,390)	2,010 (4,430)	
Bucket digging force	SAE	kN	200.2 [218.4]	200.1 [218.2]	[ ]: Power Boost
		kgf	20,410 [22,270]	20,400 [22,260]	
		lbf	45,000 [49,090]	44,970 [49,060]	
	ISO	kN	228.7 [249.5]	228.6 [249.4]	
		kgf	23,320 [25,440]	23,310 [25,430]	
		lbf	51,410 [56,080]	51,390 [56,060]	
Arm crowd force	SAE	kN	180.7 [197.2]	152.2 [166.0]	
		kgf	18,430 [20,110]	15,520 [16,940]	
		lbf	40,630 [44,320]	34,220 [37,330]	
	ISO	kN	188.0 [205.1]	157.5 [171.8]	
		kgf	19,170 [20,910]	16,060 [17,520]	
		lbf	42,260 [46,100]	35,410 [38,630]	

Note: Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

# Dimensions & Working Range


## R430LC-9SH DIMENSIONS

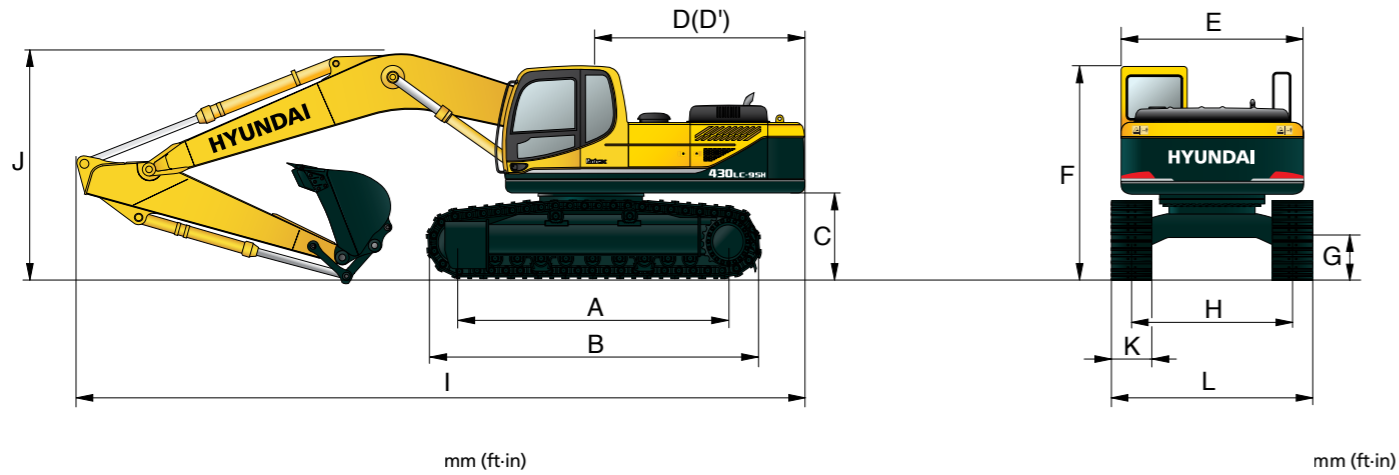

mm (ft-in)		mm (ft-in)				
A	Tumbler distance	4,470 (14' 3")				
B	Overall length of crawler	5,462 (17' 4")				
C	Ground clearance of counterweight	1,295 (4' 3")				
D	Tail swing radius	3,415 (11' 2")				
D'	Rear-end length	3,350 (10' 12")				
E	Overall width of upperstructure	2,980 (9' 9")				
F	Overall height of cab	3,190 (10' 5")				
G	Min. ground clearance	555 (1' 10")				
H	Track gauge	2,740 (8' 12")				
	Boom length	6,500 (21' 4")				
	Arm length	2,600 (8' 6")	3,200 (10' 6")			
I	Overall length	11,240 (36' 11")	11,270 (36' 12")			
J	Overall height of boom	3,780 (12' 5")	3,500 (11' 6")			
K	Track shoe width	600 (24")	700 (28")	750 (30")	800 (32")	900 (36")
L	Overall width	3,340 (10' 11")	3,440 (11' 3")	3,490 (11' 5")	3,540 (11' 7")	3,640 (11' 11")

## R430LC-9SH WORKING RANGE

		mm (ft-in)	
	Boom length	6,500 (21' 4")	
	Arm length	2,600 (8' 6")	3,200 (10' 6")
A	Max. digging reach	10,820 (35' 6")	11,250 (36' 11")
A'	Max. digging reach on ground	10,580 (34' 9")	11,030 (36' 2")
B	Max. digging depth	6,870 (22' 6")	7,470 (24' 6")
B'	Max. digging depth (8' level)	6,690 (21' 11")	7,310 (23' 12")
C	Max. vertical wall digging depth	6,000 (19' 8")	6,290 (20' 8")
D	Max. digging height	10,710 (35' 2")	10,630 (34' 11")
E	Max. dumping height	7,480 (24' 6")	7,470 (24' 6")
F	Min. swing radius	4,530 (14' 10")	4,450 (14' 7")

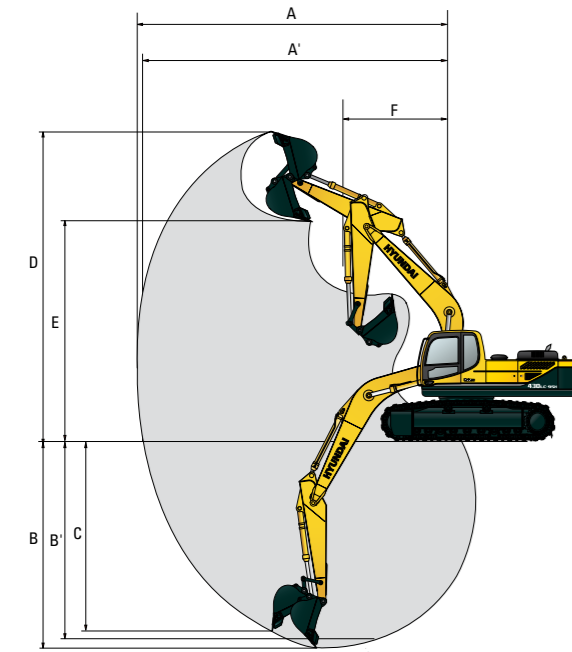

# Lifting Capacity

## R430LC-9SH

Rating over-front Rating over-side or 360 degree

Boom : 6.5 m (21' 4") / Arm : 2.6 m (10' 6") / Bucket : 2.10 m<sup>3</sup> (2.75 yd<sup>3</sup>) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius										At max. reach					
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach		
																m (ft)	
9.0 m (30 ft)	kg														*6020	*6020	7.12
	lb														*13270	*13270	(23.4)
7.5 m (25 ft)	kg														*5940	5660	8.39
	lb														*13100	12480	(27.5)
6.0 m (20 ft)	kg							*7070	*7070	*6570	*6570				*6020	4550	9.20
	lb							*15590	*15590	*14480	*14480				*13270	10030	(30.2)
4.5 m (15 ft)	kg					*10890	*10890	*8400	*8400	*7190	6790				*6170	3950	9.69
	lb					*24010	*24010	*18520	*18520	*15850	14970				*13600	8710	(31.8)
3.0 m (10 ft)	kg					*14190	*14190	*9990	9460	*8020	6450	4530			*6370	3670	9.90
	lb					*31280	*31280	*22020	20860	*17680	14220	*11640	9990		*14040	8090	(32.5)
1.5 m (5 ft)	kg					*16530	13940	*11390	8870	*8820	6130	*6160	4380		*6600	3620	9.85
	lb					*36440	30730	*25110	19550	*19440	13510	*13580	9660		*14550	7980	(32.3)
Ground	kg					*17350	13540	*12240	8510	*9360	5910				*6850	3810	9.55
Line	lb					*38250	29850	*26980	18760	*20640	13030				*15100	8400	(31.3)
-1.5 m (-5 ft)	kg					*18300	*18300	*17100	13500	*12400	8380	*9440	5820		*7060	4330	8.95
	lb					*40340	*40340	*37700	29760	*27340	18470	*20810	12830		*15560	9550	(29.4)
-3.0 m (-10 ft)	kg	*20700	*20700	*22350	*22350	*15910	13710	*11730	8470						*7110	5430	8.00
	lb	*45640	*45640	*49270	*49270	*35080	30230	*25860	18670						*15670	11970	(26.2)
-4.5 m (-15 ft)	kg					*18450	*18450	*13360	*9560	8830					*6560	*6560	6.49
	lb					*40680	*40680	*29450	*21080	19470					*14460	*14460	(21.3)

Boom : 6.5 m (21' 4") / Arm : 3.2 m (10' 6") / Bucket : 1.90 m<sup>3</sup> (2.49 yd<sup>3</sup>) SAE heaped / Shoe : 600mm(24") triple grouser

Load point height m (ft)		Load radius										At max. reach						
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach			
																m (ft)		
9.0 m (30 ft)	kg														*5360	*5360	7.74	
	lb														*11820	*11820	(25.4)	
7.5 m (25 ft)	kg									*3900	*3900				*5410	5250	8.91	
	lb									*8600	*8600				*11930	11570	(29.2)	
6.0 m (20 ft)	kg									*5980	*5980				*5540	4300	9.68	
	lb									*13180	*13180				*12210	9480	(31.8)	
4.5 m (15 ft)	kg									*7640	*7640				*5730	3760	10.14	
	lb									*16840	*16840				*12630	8290	(33.3)	
3.0 m (10 ft)	kg					*12880	*12880	*9320	*9320	*7590	6670	*3800	*3800		*5980	3490	10.34	
	lb					*28400	*28400	*20550	*20550	*16730	14700	*8380	*8380		*13180	7690	(33.9)	
1.5 m (5 ft)	kg					*15700	14410	*10900	9130	*8510	6310	*5750	4720		*6250	3430	10.29	
	lb					*34610	31770	*24030	20130	*18760	13910	*12680	10410		*13780	7560	(33.8)	
Ground	kg					*13740	*13740	*17160	13750	*12010	8670	*9220	6030		*6910	4530	10.01	
Line	lb					*30290	*30290	*37830	30310	*26480	19110	*20330	13290		*15230	9990	*14460	7870 (32.8)
-1.5 m (-5 ft)	kg	*14390	*14390	*18220	*18220	*17420	13540	*12480	8450	*9530	5880	*6440	4380		*6880	3980	9.44	
	lb	*31720	*31720	*40170	*40170	*38400	29850	*27510	18630	*21010	12960	*12400	9660		*15170	8770	(31.0)	
-3.0 m (-10 ft)	kg	*18590	*18590	*23550	*23550	*16700	13630	*12190	8440	*9220	5890				*7140	4830	8.55	
	lb	*40980	*40980	*51920	*51920	*36820	30050	*26870	18610	*20330	12990				*15740	10650	(28.1)	
-4.5 m (-15 ft)	kg	*23340	*23340	*21080	*21080	*14800	13960	*10810	8660						*7160	6750	7.18	
	lb	*51460	*51460	*46470	*46470	*32630	30780	*23830	19090						*15790	14880	(23.6)	
-6.0 m (-20 ft)	kg							*10680	*10680									
	lb							*23550	*23550									

- Lifting capacity is based on ISO 10567.
- Lifting capacity of the Robex Series does not exceed 75% of the tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
- The load point is a hook located on the back of the bucket.
- (\*) indicates the load limited by hydraulic capacity.