



Head Office (Sales office)

First tower, 55, Bundang-ro, Bundang-gu, Seongnam-si, Gyeonggi-do, Korea

PLEASE CONTACT

[www.hyundai-ce.com](http://www.hyundai-ce.com)

2019. 11 Rev.7

MOVING YOU **FURTHER**

# HW180

With Tier4 final / Stage IV Engine installed



\*Photo may include optional equipment.

**Net Power**

SAE J1349 / 171 HP (127 kW) at 1,800 rpm

**Gross Power**

SAE J1995 / 180 HP (134 kW) at 1,800 rpm

**Travel Speed**

35 km/h (21.7 mph)  
20 km/h (12.4 mph) - OPT

**Operating Weight**

17,800kg (39,240 lb)







# RULE THE GROUND

The HW Series excavators are products of HHI's spirit of initiative, creativity, and strong drive. HHI's engineers, who are the best in the industry, have worked tirelessly to offer a zero-defect product. The new HW Series reflects customers' needs in the field gleaned by thorough monitoring. They maximize fuel efficiency and performance proven by rigorous field tests and quality control.



\*Photo may include optional equipment.



# RULE THE GROUND

The HW series exceeds customer's expectation!  
Become a true leader on the ground with HHI's HW series.

# HW180



## WORK MAX, WORTH MAX

- ECO Gauge
- IPC (Intelligent Power Control)
- New Variable Power Control
- Electronic Viscous Fan Clutch
- Attachment Flow Control (Option)
- New Cooling System with Increased Air Flow
- Enlarged Air Inlet with Grill Cover
- Cycle Time Improvement



## MORE RELIABLE, MORE SUSTAINABLE

- Durable Cooling Module
- Reinforced Pin, Bush, and Polymer Shim
- Reinforced Durability of Upper and Lower Structure and Attachments
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses



## INFOTAINMENT FRONTIER

- Intelligent and Wide Cluster
- Haptic Control
- Operating Simulation for Joy & Achievement
- Wi-Fi Direct with Smart Phone (Miracast)
- Proportional Auxiliary Hydraulic System
- New Audio System
- New Air Conditioning System



## MODERN COMFORT, SIMPLE AND SAFE SOLUTION

- AAVM (Advanced Around View Monitoring) Camera System (Option)
- Easy Access to DEF/AdBlue® Supply System
- Hi-mate (Remote Management System) (Option)
- Swing Lock System (Option)
- Fine Swing Control (Option)



\*Photo may include optional equipment.





### Cycle Time Improvement

The HW Series provides higher productivity on the site by faster operation: it loads trucks up to 15% faster and levels up to 12% faster than the 9 Series.

# WORK MAX, WORTH MAX

## Fuel Efficient System, Allows Great Performance

The HW Series has an eco-friendly, high-performance engine which ensures both excellent fuel efficiency and high power. With outstanding operating performance proven by rigorous tests at various work sites, it will satisfy any customer's needs.




### ECO Gauge

Eco Gauge enable economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed are displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.



### IPC (Intelligent Power Control)

The IPC controls Power depending on work environments. Its mode can be selected and released on the monitor. On the excavation mode, pump flow can be easily controlled by a lever, reducing fuel consumption.

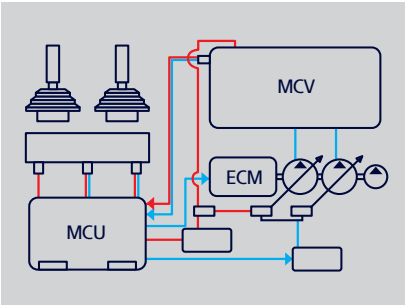

### New Variable Power Control

The HW Series minimizes equipment input and output control signals to improve fuel efficiency. Its three-stage Power mode ensures the highest performance in any operating environment.

- \* P(power) mode: Maximizes speed and power of the equipment for heavy load work.
- \* S(standard) mode: Optimizes performance and fuel efficiency of the equipment for general load work.
- \* E(economy) mode: Improves the control system for light load work.



### Attachment Flow Control (Option)

The HW Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (ten breaker types and ten crusher types), enabling various operations matching the site environments.



### New Cooling System with Increased Air Flow

The HW Series provides excellent cooling performance by increasing heat dissipation and can be easily cleaned.

### Electronic Viscous Fan Clutch

The electronic fan clutch reduces noise during operation by precisely controlling RPM depending on the hydraulic oil and coolant temperature of the working vehicle, and minimizes fuel consumption. It is also possible to shorten the warm up time of hydraulic oil.

### Enlarged Air Inlet with Grill Cover


Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.



# MORE RELIABLE, MORE SUSTAINABLE

## New Exterior Design for Robustness and Safety

The true value of the HW Series lies in its durability. The robust upper and lower frame structure that can endure external shock and high-load work and the attachments whose performance was proven by rigorous tests further show the real value of the HW Series in tough working environments and promise higher productivity.

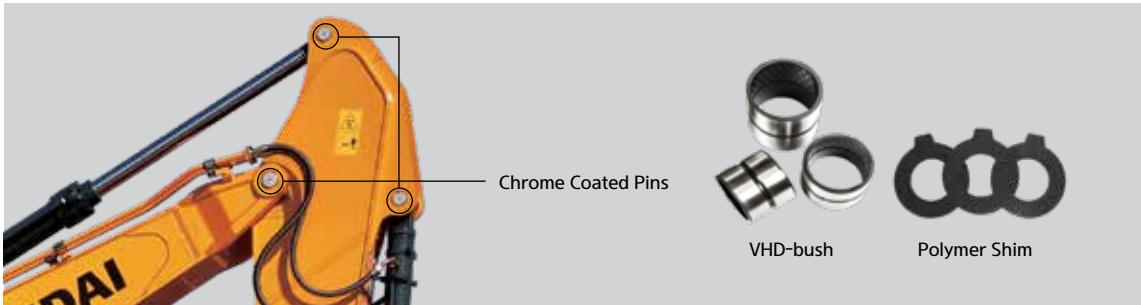

### Reinforced Pin, Bush, and Polymer Shim

The HW series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes, and polymer shims, supporting the highest performance with invariable durability.



### Durable Cooling Module

The HW Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.



### Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of the HW Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



\*Photo may include optional equipment.



### Hi-grade (High-pressure) Hoses

The HW Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.





\*Photo may include optional equipment.

### New Air Conditioning System

With further improved air conditioning and heating, the HW Series increases the APTC capacity by 15% to provide a pleasant environment for operators all the time. The ventilation was designed such that warm and cool air even reach operators' faces (increasing their work satisfaction) or allowing pleasant working environment.

# INFOTAINMENT FRONTIER

## Enhanced Instrument Panel for Easier Monitoring

Many electronic functions are concentrated on the most convenient spot for operators to ensure work efficiency. The highly-advanced infotainment system, a product of HHI's intensive information technology, enables both productivity and pleasant work at the same time! The HW Series of HHI provides higher value and pleasure to customers.



### Intelligent and Wide Cluster

The 8-inch capacitive-type display (like smartphone display) of the HW Series is 15% larger than the previous model, delivering excellent legibility. The centralized switches on the display allow convenience of checking the urea level and temperature outside the cabin. The audio AUX, air conditioner, heater interoperation, wiper, lamp, overload warning, travel, alarm and inclination sensor also maximize operator's convenience.



### Haptic Control

The integrated jog shuttle-type haptic controller applies to the accelerator, remote air conditioner controller, and operate cluster, allowing convenient operation. In the event of failure of the haptic switch, the emergency mode is activated on the cluster to ensure fail-safe function.



### New Audio System

Radio player, USB-based MP3 player, integrated Bluetooth hands-free feature, and built-in microphone allow convenient phone calls while in work and in transit. The radio player was moved to the right side from the rear, allowing easier access.

### Wi-Fi Direct with Smart Phone (Miracast)

The Miracast system based on Wi-Fi of the operator's smart phone enables easy and convenient use of various features of the smart phone on the big screen including navigation, web surfing, viewing of videos, and listening to music. (For Android mobile phone now)



### Proportional Auxiliary Hydraulic System

- Opt: Proportional control switch for better speed control
- Enlarge the operation convenience



# MODERN COMFORT, SIMPLE AND SAFE SOLUTION

## New Cabin for More Comfort

Low noise, low vibration, and ergonomic design make the cabin space more comfortable and pleasant! With focus on safety and convenience of operators, the HW Series allows rapid and safe equipment inspection anytime and anywhere, providing an optimal environment for operators to work.



### AAVM (Advanced Around View Monitoring) Camera System (Option)

The HW Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front and rear and to the right and left.



### Easy Access to DEF/AdBlue® Supply System

The DEF/AdBlue® tank is installed inside the tool box and its inlet is remotely located for easy access and convenient supply. Warning of overfill is given by a red lamp signal.



\*AVM (Around View Monitoring): Secure field of vision in all directions by nine views including 3D bird's eye view and 2D/4CH view.

\*IMOD (Intelligent Moving Object Detection): Inform when people or dangerous objects are detected within the range of operation (recognition distance: 5 m).



### Hi-MATE (Remote Management System) (Option)

Hi-MATE, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi-MATE saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

\* Operation of the system may be affected by the condition of telecommunication signal



\*Photo may include optional equipment.

### Swing Lock System (Option)

Swing Lock System is provided to maintain stability when swing movement needs to be limited, improving operating speed and productivity.

### Fine Swing Control (Option)

Fine swing control is available for customer's convenience when users want to control fine swing.



SPECIFICATIONS

ENGINE			
Maker / Model		Cummins QSB6.7	
Type		Water-cooled, 4-cycle diesel, 6-cylinder in-line, Direct injection, Turbocharged, Charge air cooled, Low emission	
Rated flywheel horse power	SAE	J1995 (gross)	180 HP (134kW) at 1,800 rpm
		J1349 (net)	171 HP (127kW) at 1,800 rpm
	DIN	6271/1 (gross)	182 PS (134kW) at 1,800 rpm
		6271/1 (net)	173 PS (127kW) at 1,800 rpm
Max. torque		85.7 kgf.m(620 lbf.ft) at 1,500 rpm	
Bore × stroke		107 x 124 mm (4.21" x 4.88")	
Piston displacement		6,700 cc (409 in3)	
Batteries		2 x 12 V x 100 AH	
Starting motor		24V-4.8kW	
Alternator		24V-95 Amp	

HYDRAULIC SYSTEM	
MAIN PUMP	
Type	Two variable displacement piston pumps
Max. flow	2 X 172 L /min (45.4 US gpm/37.8 UK gpm)
Sub-pump for pilot circuit	Gear pump

Cross-sensing and fuel saving pump system

HYDRAULIC MOTORS	
Travel	Variable displacement pistons motor with brake valve
Swing	Axial piston motor with automatic brake

RELIEF VALVE SETTING	
Implement circuits	350 kgf/cm² (4,970 psi)
Travel	380 kgf/cm² (5,400 psi)
Power boost (boom, arm, bucket)	380 kgf/cm² (5,400 psi)
Swing circuit	285 kgf/cm² (4,050 psi)
Pilot circuit	40 kgf/cm² (570 psi)
Service valve	Installed

HYDRAULIC CYLINDERS	
No. of cylinder bore X stroke	Boom: 2-115 x 1,090 mm (4.5" x 42.9")
	Arm: 1-120 x 1,355 mm (4.7" x 53.3")
	Bucket: 1-110 x 995 mm (4.3" x 39.2")
	Blade: 2-110 x 235 mm (4.3" x 9.3")
	Outrigger: 2-125 x 463 mm (4.9" x 18.2")
	2-PCS boom: 2-115 x 960mm (4.1" x 37.8")
	Adjust(boom): 1-160 x 650mm (6.29" x 25.6")

\* Hyundai Bio Hydraulic Oil (HBHO) available

DRIVES & BRAKES	
4-wheel hydrostatic drive. Constant mesh, helical gear transmission provides 2 forward and reverse travel speeds.	
Max. drawbar pull	10,320 kgf (22,750 lbf)
Travel speed	1st 9.5 km/h
	2nd 35 km/h or 20 km/h (Option)
Gradeability	35° (70 %)
Service Brake :	
- Independent dual brake, front and rear axle full hydraulic power brake.	
- Spring released and hydraulic applied wet type multiple disc brake.	
Parking Brake :	
- Spring applied and hydraulic released wet disc brake type in transmission.	

CONTROL	
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.	
Pilot control	Two joysticks with one safety lever (LH): Swing and arm, (RH): Boom and bucket (ISO)

CONTROL	
Engine throttle	Electric, Dial type
Lights	Two lights mounted on the boom, one under the battery box and one under the cabin

AXLE & WHEEL	
Full floating front axle is supported by center pin for ocillation. It can be locked by ocillation lock cylinders. Rear axle is fixed on the lower chassis.	
Tires	10.00-20-14PR, Dual(tube type)
(Optional)	10.00-20, Dual(solid type)
	10.00-20-16PR, Dual(tube type)

SWING SYSTEM	
Swing motor	Fixed displacement axial pistons motor
Swing reduction	Planetary gear reduction
Swing bearing lubrication	Grease-bathed
Swing brake (option)	Multi wet disc (pin lock type)
Swing speed	9.3rpm

STEERING SYSTEM	
Hydraulically actuated, orbitrol type steering system actuates on front wheels through the steering cylinders.	
Min. turning radius	6,300 mm(20' 8")

COOLANT & LUBRICANT CAPACITY				
Re-filling	liter	US gal	UK gal	
Fuel tank	290	76.6	63.8	
Engine coolant	19.5	5.2	4.3	
Engine oil	23.7	6.3	5.2	
Swing device – gear oil (OPT)	6.2	1.64	1.36	
Swing device - greese (OPT)	(1.2)	(0.32)	(0.26)	
Axle	Front	15.5	4.11	3.4
	Rear	17.5	4.6	3.9
Transmission	2.5	0.7	0.5	
Hydraulic system (including tank)	270	71.3	59.4	
Hydraulic tank	125	32.8	27.3	
DEF/AdBlue®	27	7.1	5.9	

UNDERCARRIAGE	
Reinforced box-section frame is all-welded, low-stress. Dozer blade and outriggers are available. A pin-on design.	
Dozer blade	A very useful addition for leveling and back filling or clean-up work.
Outrigger	Indicated for max. operation stability when digging and lifting. Can be mounted on the front/or the rear.








OPERATING WEIGHT (APPROXIMATE)		
Operating weight, including 5,200mm (17' 1") Mono boom, 2,600mm (8' 6") arm, SAE heaped 0.76 m³ (0.99 yd³) backhoe bucket, lubricant, coolant, full fuel tank, hydraulic tank and the standard equipment.		

OPERATING WEIGHT		
Undercarriage	Mono boom	Hyd. 2-Piece boom
Rear dozer blade	17,800 kg (39,240 lb)	18,270 kg (40,280 lb)
	18,020 kg (39,730 lb)	18,490 kg (40,760 lb)
Rear outrigger	18,860 kg (41,580 lb)	19,330 kg (42,620 lb)
Front outrigger and rear blade	18,780 kg (41,400 lb)	19,250 kg (42,440 lb)
Front blade and rear outrigger	19,030 kg (41,960 lb)	19,500 kg (42,990 lb)
Four outrigger		

AIR CONDITIONING SYSTEM	
The air condition system for the machine contains the fluorinated greenhouse gas with global warming potential of R134a. (Global Warming Potential : 1430)	
The system hold 0.65kg refrigerant consisting of a CO2 equivalent 0.93kg metric tonne. For more information, Please refer to the manual.	

BUCKET SELECTION GUIDE & DIGGING FORCE

BUCKETS

							
SAE heaped m³ (yd³)	0.39 (0.51)	0.50 (0.65)	0.64 (0.84)	0.70 (0.92)	0.89 (1.16)	0.69 (0.90)	0.75 (0.90)
			0.70 (0.92)		1.05 (1.37)		
			0.76 (0.99)				

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft.in)				
					5,200 (17' 1") Mono Boom			5,100 (16' 9") 2-Piece Boom	
					2,200 (7' 3") Arm	2,600 (8' 6") Arm	3,100 (10' 2") Arm	2,200 (7' 3") Arm	2,600 (8' 6") Arm
SAE heaped	CECE heaped	Without side cutters	With side cutters						
0.39 (0.51)	0.34 (0.44)	650 (25.6)	740 (29.1)	410 (900)	●	●	●	●	●
0.50 (0.65)	0.44 (0.58)	790 (31.1)	880 (34.6)	470 (1,040)	●	●	●	●	●
0.64 (0.84)	0.55 (0.72)	950 (37.4)	1,040 (40.9)	510 (1,120)	■	■	▲	■	■
0.70 (0.92)	0.60 (0.78)	1,020 (40.2)	1,110 (43.7)	600 (1,320)	■	■	▲	■	▲
0.76 (0.99)	0.65 (0.85)	1,090 (42.9)	1,180 (46.5)	620 (1,370)	■	▲	▲	■	▲
0.89 (1.16)	0.77 (1.01)	1,250 (49.2)	1,340 (52.8)	610 (1,340)	▲	▲	-	▲	▲
1.05(1.37)	0.90 (1.18)	1,430 (56.3)	1,520 (59.8)	680 (1,500)	▲	-	-	▲	-
0.69 (0.90)	0.62 (0.81)	1,050 (41.3)	-	720 (1,590)	■	▲	▲	■	▲
0.75 (0.98)	0.65 (0.85)	1,820 (71.7)	-	540 (1,190)	■	■	▲	■	▲

■ Heavy duty bucket  
◎ Ditch cleaning bucket

● : Applicable for materials with density of 2,000 kgf/m³ (3,370 lbf/yd³) or less  
■ : Applicable for materials with density of 1,600 kgf/m³ (2,700 lbf/yd³) or less  
▲ : Applicable for materials with density of 1,100 kgf/m³ (1,850 lbf/yd³) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design. 2.2 m (7' 3") & 2.5 m (8' 2") arms are available.

DIGGING FORCE						
Arm	Length	mm (ft.in)	2,200 (7' 3")		2,600 (8' 6")	Remark
	Weight	kg (lb)	750 (1,650)		810 (1,790)	
Bucket digging force	SAE	kN	98.1 [106.5]		98.1 [106.5]	[ ] : Power Boost
		kgf	10,000 [10,860]		10,000 [10,860]	
		lbf	22,050 [23,940]		22,050 [23,940]	
	ISO	kN	113.4 [123.1]		113.4 [123.1]	
		kgf	11,560 [12,550]		11,560 [12,550]	
		lbf	25,490 [27,670]		25,490 [27,670]	
Arm crowd force	SAE	kN	76.0 [82.5]		66.4 [72.1]	
		kgf	7,750 [8,410]		9,770 [7,350]	
		lbf	17,090 [18,550]		16,930 [16,210]	
	ISO	kN	79.4 [86.2]		69.1 [75.1]	
		kgf	8,100 [8,790]		7,050 [7,650]	
		lbf	17,860 [19,390]		15,540 [16,870]	


Note : Arm weight includes bucket cylinder, linkage, and pin



# DIMENSIONS & WORKING RANGE

## HW180 MONO BOOM DIMENSIONS


5.2 m (17' 1") Mono boom, 2.2 m(7'3"), 2.6 m(8'6"), 3.1 m(10'2") Arm, Rear dozer

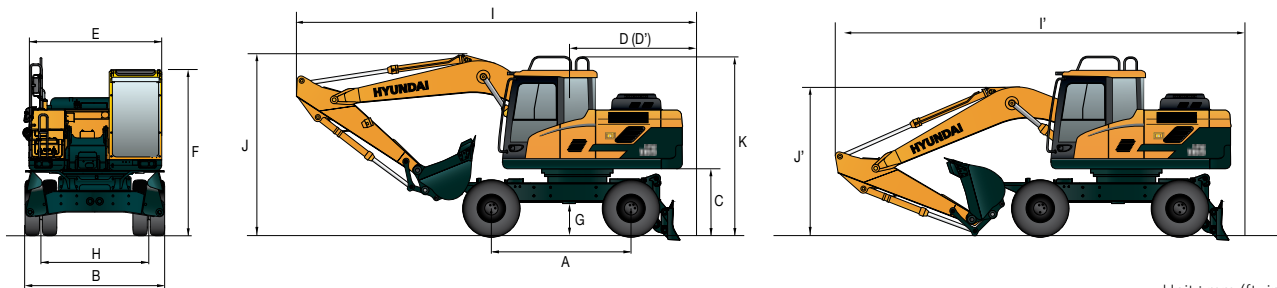

A	Wheel base	2,600 (8' 6")
B	Overall width (STD / Wide axle)	2,530 (8' 4") / 2,700 (8' 10")
C	Ground clearance of counterweight	1,270 (4' 2")
D	Rear-end distance	2,430 (8' 0")
D'	Rear-end swing radius	2,430 (8' 0")
E	Upperstructure width	2,475 (8' 1")
F	Overall height of cab	3,190 (10' 6")
G	Min. ground clearance	340 (1' 1")
H	Tread	1,944 (6' 5")
K	Overall height of guardrail / Separable type	3,420 (11' 3") / 3,282 (10' 9")

	Boom length	5,200 (17' 1")		
	Arm length	2,200 (7' 3")	2,600 (8' 6")	3,100 (10' 2")
I	Overall length (Traveling position)	8,590 (28' 2")	8,710 (28' 7")	8,480 (27' 10")
I'	Overall length (Shipping position)	8,650 (28' 5")	8,760 (28' 9")	8,760 (28' 9")
J	Overall height of boom (Traveling position)	3,610 (11' 10")	3,540 (11' 7")	3,900 (12' 10")
J'	Overall height of boom (Shipping position)	3,060 (10' 0")	3,180 (10' 5")	3,150 (10' 4")


## HW180 MONO BOOM WORKING RANGE

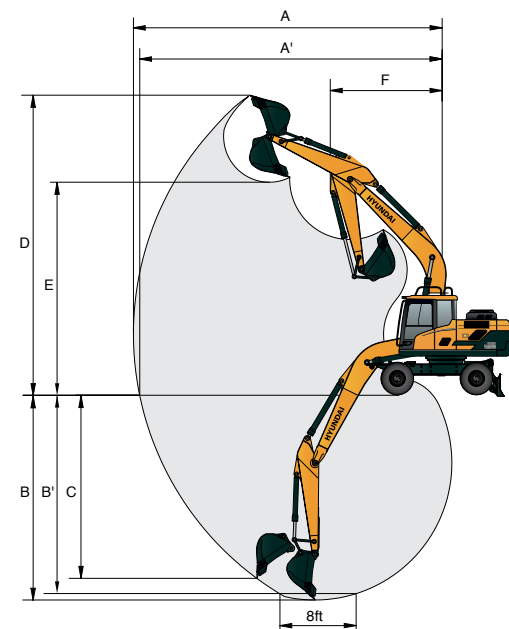

	Boom length	5,200 (17' 1")		
	Arm length	2,200 (7' 3")	2,600 (8' 6")	3,100 (10' 2")
A	Max. digging reach	8,820 (29' 1")	9,200 (30' 3")	9,450 (31' 0")
A'	Max. digging reach on ground	8,615 (28' 4")	9,000 (29' 7")	9,250 (30' 4")
B	Max. digging depth	5,500 (18' 2")	5,900 (19' 5")	6,320 (20' 9")
B'	Max. digging depth (8' level)	5,280 (17' 5")	5,700 (18' 9")	6,130 (20' 1")
C	Max. vertical wall digging depth	4,850 (16' 1")	5,310 (17' 6")	5,470 (17' 11")
D	Max. digging height	9,180 (30' 3")	9,300 (30' 7")	9,220 (30' 3")
E	Max. dumping height	6,520 (21' 5")	6,660 (21' 8")	6,620 (21' 9")
F	Min. swing radius	3,290 (10' 9")	3,230 (10' 8")	3,160 (10' 4")

## HW180 2-PIECE BOOM DIMENSIONS


5.1 m (16' 9") 2-Piece boom, 2.2 m (7' 3"), 2.6 m (8' 6") Arm, Rear dozer

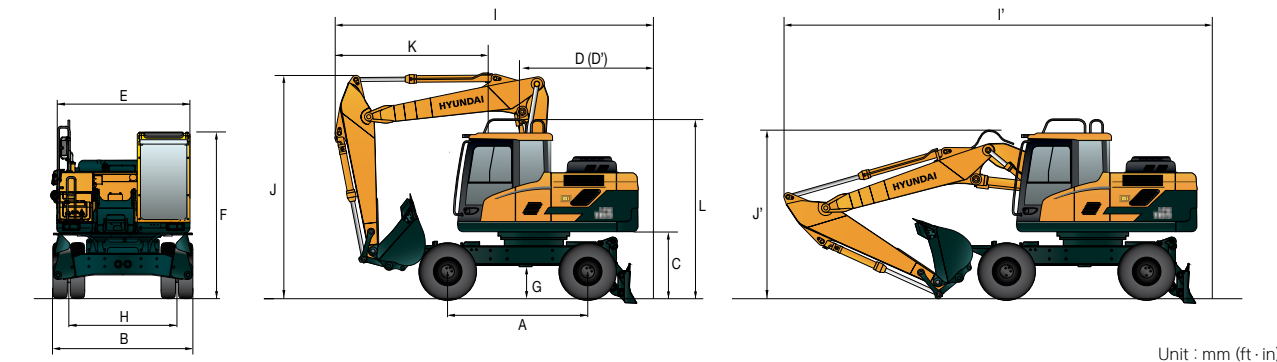

A	Wheel base	2,600 (8' 6")
B	Overall width (STD / Wide axle)	2,530 (8' 4") / 2,700 (8' 10")
C	Ground clearance of counterweight	1,270 (4' 2")
D	Rear-end distance	2,430 (8' 0")
D'	Rear-end swing radius	2,430 (8' 0")
E	Upperstructure width	2,475 (8' 1")
F	Overall height of cab	3,190 (10' 6")
G	Min. ground clearance	340 (1' 1")
H	Tread	1,944 (6' 5")
L	Overall height of guardrail / Separable type	3,420 (11' 3") / 3,282 (10' 9")

	Boom length	5,100 (16' 9")	
	Arm length	2,200 (7' 3")	2,600 (8' 6")
I	Overall length (Traveling position)	6,630 (21' 9")	6,620 (21' 9")
I'	Overall length (Shipping position)	8,650 (28' 5")	8,750 (28' 8")
J	Overall height of boom (Traveling position)	3,980 (13' 1")	3,960 (13' 0")
J'	Overall height of boom (Shipping position)	2,900 (9' 6")	2,920 (9' 7")
K	End of attachment to steering wheel	3,300 (10' 10")	3,290 (10' 10")

## HW180 2-PIECE BOOM WORKING RANGE

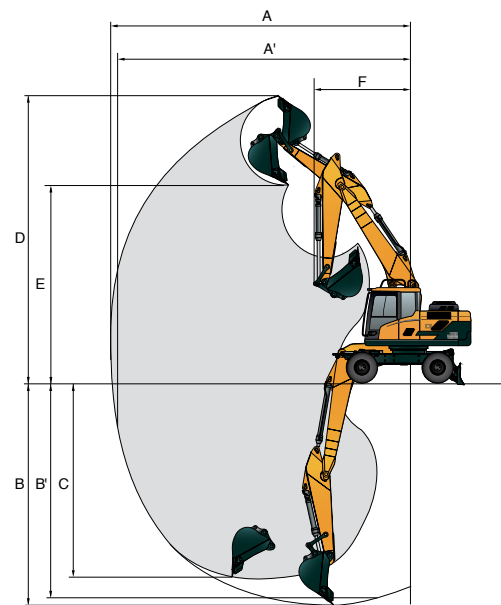

	Boom length	5,100 (16' 9")	
	Arm length	2,200 (7' 3")	2,600 (8' 6")
A	Max. digging reach	8,760 (28' 9")	9,110 (29' 11")
A'	Max. digging reach on ground	8,550 (28' 1")	8,910 (29' 3")
B	Max. digging depth	5,220 (17' 2")	5,620 (18' 5")
B'	Max. digging depth (8' level)	5,120 (16' 10")	5,520 (18' 1")
C	Max. vertical wall digging depth	4,430 (14' 6")	4,780 (15' 8")
D	Max. digging height	9,630 (31' 7")	9,820 (32' 3")
E	Max. dumping height	6,930 (22' 9")	7,130 (23' 5")
F	Min. swing radius	3,100 (10' 2")	2,970 (9' 9")











LIFTING CAPACITY









 Rating over-front     Rating over-side or 360 degree

HW180 MONO BOOM

5.20 m (17' 1") Mono boom, 2.20 m (7' 3") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade down.

Load point height m (ft)		Load radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m (24.6 ft)	kg lb							*3,180 *7,010	*3,180 *7,010	4.85 (15.9)
6.0 m (19.7 ft)	kg lb					*4,030 *8,880	3,650 8,050	*2,680 *5,910	*2,680 *5,910	6.22 (20.4)
4.5 m (14.8 ft)	kg lb			*5,470 *12,060	*5,470 *12,060	*4,740 *10,450	3,590 7,910	*2,510 *5,530	*2,510 *5,530	7.01 (23.0)
3.0 m (9.8 ft)	kg lb			*6,730 *14,840	5,250 11,570	4,960 10,930	3,450 7,610	*2,500 *5,510	*2,500 *5,510	7.41 (24.3)
1.5 m (4.9 ft)	kg lb			7,450 16,420	4,940 10,890	4,810 10,600	3,310 7,300	*2,610 *5,750	2,420 5,340	7.49 (24.6)
Ground Line	kg lb			7,280 16,050	4,790 10,560	4,710 10,380	3,220 7,100	*2,880 *6,350	2,500 5,510	7.25 (23.8)
-1.5 m (-4.9 ft)	kg lb	*9,430 *20,790	9,060 19,970	7,270 16,030	4,780 10,540	4,700 10,360	3,210 7,080	*3,430 *7,560	2,810 6,190	6.67 (21.9)
-3.0 m (-9.8 ft)	kg lb	*8,980 *19,800	*8,980 *19,800	*6,470 *14,260	4,890 10,780			*4,630 *10,210	3,630 8,000	5.62 (18.4)

5.20 m (17' 1") Mono boom, 2.20 m (7' 3") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blad up.

Load point height m (ft)		Load radius						At max. reach		
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach
										m (ft)
7.5 m (24.6 ft)	kg lb							*3,180 *7,010	*3,180 *7,010	4.85 (15.9)
6.0 m (19.7 ft)	kg lb					*4,030 *8,880	3,460 7,630	*2,680 *5,910	*2,680 *5,910	6.22 (20.4)
4.5 m (14.8 ft)	kg lb			*5,470 *12,060	5,300 11,680	*4,740 *10,450	3,410 7,520	*2,510 *5,530	*2,510 *5,530	7.01 (23.0)
3.0 m (9.8 ft)	kg lb			*6,730 *14,840	4,950 10,910	4,960 10,930	3,270 7,210	*2,500 *5,510	2,370 5,220	7.41 (24.3)
1.5 m (4.9 ft)	kg lb			7,450 16,420	4,650 10,250	4,810 10,600	3,130 6,900	*2,610 *5,750	2,280 5,030	7.49 (24.6)
Ground Line	kg lb			7,280 16,050	4,510 9,940	4,710 10,380	3,040 6,700	*2,880 *6,350	2,360 5,200	7.25 (23.8)
-1.5 m (-4.9 ft)	kg lb	*9,430 *20,790	8,420 18,560	7,270 16,030	4,490 9,900	4,700 10,360	3,030 6,680	*3,430 *7,560	2,660 5,860	6.67 (21.9)
-3.0 m (-9.8 ft)	kg lb	*8,980 *19,800	8,610 18,980	*6,470 *14,260	4,600 10,140			*4,630 *10,210	3,430 7,560	5.62 (18.4)

1. Lifting capacity are based on ISO 10567.













2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4. (\*) indicates load limited by hydraulic capacity.













 Rating over-front     Rating over-side or 360 degree

HW180 MONO BOOM

5.20 m (17' 1") Mono boom, 2.60 m (8' 6") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade down.

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg lb											*2,990 *6,590	*2,990 *6,590	5.32 (17.4)
6.0 m (19.7 ft)	kg lb							*4,230 *9,330	3,720 8,200			*2,640 *5,820	*2,640 *5,820	6.59 (21.6)
4.5 m (14.8 ft)	kg lb					*5,050 *11,130	*5,050 *11,130	*4,470 *9,850	3,640 8,020			*2,540 *5,600	*2,540 *5,600	7.34 (24.1)
3.0 m (9.8 ft)	kg lb					*6,360 *14,020	5,340 11,770	5,010 11,050	3,490 7,690	3,540 7,800	2,480 5,470	*2,570 *5,670	2,370 5,220	7.72 (25.3)
1.5 m (4.9 ft)	kg lb					7,520 16,580	5,000 11,020	4,840 10,670	3,340 7,360	3,470 7,650	2,420 5,340	*2,730 *6,020	2,290 5,050	7.79 (25.6)
Ground Line	kg lb			*5,200 *11,460	*5,200 *11,460	7,310 16,120	4,820 10,630	4,720 10,410	3,230 7,120	3,430 7,560	2,380 5,250	*3,040 *6,700	2,350 5,180	7.57 (24.8)
-1.5 m (-4.9 ft)	kg lb	*5,380 *11,860	*5,380 *11,860	*9,280 *20,460	9,020 19,890	7,260 16,010	4,770 10,520	4,680 10,320	3,200 7,050			*3,660 *8,070	2,610 5,750	7.01 (23.0)
-3.0 m (-9.8 ft)	kg lb	*9,680 *21,340	*9,680 *21,340	*9,840 *21,690	9,180 20,240	*6,950 *15,320	4,840 10,670	*4,760 *10,490	3,270 7,210			*4,700 *10,360	3,250 7,170	6.03 (19.8)

5.20 m (17' 1") Mono boom, 2.60 m (8' 6") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade up.

Load point height m (ft)		Load radius										At max. reach		
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
														m (ft)
7.5 m (24.6 ft)	kg lb											*2,990 *6,590	*2,990 *6,590	5.32 (17.4)
6.0 m (19.7 ft)	kg lb							*4,230 *9,330	3,530 7,780			*2,640 *5,820	*2,640 *5,820	6.59 (21.6)
4.5 m (14.8 ft)	kg lb					*5,050 *11,130	*5,050 *11,130	*4,470 *9,850	3,460 7,630			*2,540 *5,600	2,480 5,470	7.34 (24.1)
3.0 m (9.8 ft)	kg lb					*6,360 *14,020	5,040 11,110	5,010 11,050	3,310 7,300	3,540 7,800	2,350 5,180	*2,570 *5,670	2,240 4,940	7.72 (25.3)
1.5 m (4.9 ft)	kg lb					7,520 16,580	4,710 10,380	4,840 10,670	3,160 6,970	3,470 7,650	2,290 5,050	*2,730 *6,020	2,160 4,760	7.79 (25.6)
Ground Line	kg lb			*5,200 *11,460	*5,200 *11,460	7,310 16,120	4,530 9,990	4,720 10,410	3,050 6,720	3,430 7,560	2,250 4,960	*3,040 *6,700	2,220 4,890	7.57 (24.8)
-1.5 m (-4.9 ft)	kg lb	*5,380 *11,860	*5,380 *11,860	*9,280 *20,460	8,380 18,470	7,260 16,010	4,490 9,900	4,680 10,320	3,020 6,660			*3,660 *8,070	2,460 5,420	7.01 (23.0)
-3.0 m (-9.8 ft)	kg lb	*9,680 *21,340	*9,680 *21,340	*9,840 *21,690	8,530 18,810	*6,950 *15,320	4,550 10,030	*4,760 *10,490	3,090 6,810			*4,700 *10,360	3,070 6,770	6.03 (19.8)

1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4. (\*) indicates load limited by hydraulic capacity.















LIFTING CAPACITY













 Rating over-front    Rating over-side or 360 degree

HW180 MONO BOOM

5.20 m (17' 1") Mono boom, 3.10 m (10' 2") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade down.

Load point height m (ft)		Load radius										At max. reach							
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach					
														m (ft)					
7.5 m (24.6 ft)	kg																		
	lb																		
6.0 m (19.7 ft)	kg																		
	lb																		
4.5 m (14.8 ft)	kg																		
	lb																		
3.0 m (9.8 ft)	kg																		
	lb																		
1.5 m (4.9 ft)	kg																		
	lb																		
Ground Line	kg																		
	lb																		
-1.5 m (-4.9 ft)	kg																		
	lb																		
-3.0 m (-9.8 ft)	kg																		
	lb																		
-4.5 m (-14.8 ft)	kg																		
	lb																		

5.20 m (17' 1") Mono boom, 3.10 m (10' 2") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade up.

Load point height m (ft)		Load radius										At max. reach			
		1.5 m (4.9 ft)		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach	
														m (ft)	
7.5 m (24.6 ft)	kg lb												*2,380 *5,250	*2,380 *5,250	5.95 (19.5)
6.0 m (19.7 ft)	kg lb							*3,760 *8,290	3,580 7,890				*2,150 *4,740	*2,150 *4,740	7.10 (23.3)
4.5 m (14.8 ft)	kg lb							*4,080 *8,990	3,490 7,690	*3,060 *6,750	2,410 5,310	*2,090 *4,610	*2,090 *4,610	7.80 (25.6)	
3.0 m (9.8 ft)	kg lb			*8,740 *19,270	*8,740 *19,270	*5,800 *12,790	5,120 11,290	*4,680 *10,320	3,330 7,340	3,540 7,800	2,350 5,180	*2,120 *4,670	2,040 4,500	8.16 (26.8)	
1.5 m (4.9 ft)	kg lb					*7,150 *15,760	4,750 10,470	4,840 10,670	3,160 6,970	3,460 7,630	2,270 5,000	*2,250 *4,960	1,970 4,340	8.23 (27.0)	
Ground Line	kg lb			*5,890 *12,990	*5,890 *12,990	7,300 16,090	4,520 9,960	4,700 10,360	3,020 6,660	3,390 7,470	2,210 4,870	*2,510 *5,530	2,010 4,430	8.02 (26.3)	
-1.5 m (-4.9 ft)	kg lb	*5,000 *11,020	*5,000 *11,020	*8,730 *19,250	8,250 18,190	7,200 15,870	4,430 9,770	4,630 10,210	2,960 6,530			*2,990 *6,590	2,200 4,850	7.49 (24.6)	
-3.0 m (-9.8 ft)	kg lb	*8,300 *18,300	*8,300 *18,300	*10,660 *23,500	8,370 18,450	7,230 15,940	4,460 9,830	4,660 10,270	2,990 6,590			*3,990 *8,800	2,650 5,840	6.59 (21.6)	
-4.5 m (-14.8 ft)	kg lb			*7,860 *17,330	*7,860 *17,330	*5,360 *11,820	4,630 10,210					*4,390 *9,680	3,910 8,620	5.09 (16.7)	

1. Lifting capacity are based on ISO 10567.









2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4. (\*) indicates load limited by hydraulic capacity.









 Rating over-front    Rating over-side or 360 degree

HW180 2-PIECE BOOM

5.10 m (16' 9") Mono boom, 2.20 m (7' 3") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade down.

Load point height m (ft)		Load radius										At max. reach	
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach		m (ft)	
													
7.5 m (24.6 ft)	kg lb											4.73 (15.5)	
6.0 m (19.7 ft)	kg lb											6.13 (20.1)	
4.5 m (14.8 ft)	kg lb											6.93 (22.7)	
3.0 m (9.8 ft)	kg lb											7.33 (24.1)	
1.5 m (4.9 ft)	kg lb											7.41 (24.3)	
Ground Line	kg lb											7.17 (23.5)	
-1.5 m (-4.9 ft)	kg lb											6.58 (21.6)	

5.10 m (16' 9") Mono boom, 2.20 m (7' 3") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade up.

Load point height m (ft)		Load radius										At max. reach	
		3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		Capacity		Reach		m (ft)	
													
7.5 m (24.6 ft)	kg lb											4.73 (15.5)	
6.0 m (19.7 ft)	kg lb											6.13 (20.1)	
4.5 m (14.8 ft)	kg lb											6.93 (22.7)	
3.0 m (9.8 ft)	kg lb											7.33 (24.1)	
1.5 m (4.9 ft)	kg lb											7.41 (24.3)	
Ground Line	kg lb											7.17 (23.5)	
-1.5 m (-4.9 ft)	kg lb											6.58 (21.6)	

1. Lifting capacity are based on ISO 10567.











2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).











4. (\*) indicates load limited by hydraulic capacity.



LIFTING CAPACITY

 Rating over-front     Rating over-side or 360 degree

HW180 2-PIECE BOOM											
5.10 m (16' 9") Mono boom, 2.60 m (8' 6") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade down.											
Load point height m (ft)	Load radius								At max. reach		
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
											m (ft)
7.5 m (24.6 ft)	kg		*4,190	*4,190					*3,450	*3,450	5.24
	lb		*9,240	*9,240					*7,610	*7,610	(17.2)
6.0 m (19.7 ft)	kg				*4,110	3,720			*3,000	*3,000	6.53
	lb				*9,060	8,200			*6,610	*6,610	(21.4)
4.5 m (14.8 ft)	kg		*4,820	*4,820	*4,310	3,650			*2,850	2,640	7.28
	lb		*10,630	*10,630	*9,500	8,050			*6,280	5,820	(23.9)
3.0 m (9.8 ft)	kg		*6,060	5,360	*4,830	3,490	3,550	2,470	*2,850	2,380	7.67
	lb		*13,360	11,820	*10,650	7,690	7,830	5,450	*6,280	5,250	(25.2)
1.5 m (4.9 ft)	kg		*7,280	5,010	4,870	3,330	3,490	2,410	*2,990	2,290	7.74
	lb		*16,050	11,050	10,740	7,340	7,690	5,310	*6,590	5,050	(25.4)
Ground	kg	*4,760	*4,760	7,350	4,810	4,750	3,220	*3,430	2,370	7.51	
Line	lb	*10,490	*10,490	16,200	10,600	10,470	7,100	*7,560	5,220	(24.6)	
-1.5 m (-4.9 ft)	kg	*8,980	*8,980	7,300	4,760	4,710	3,190		3,850	2,640	6.95
	lb	*19,800	*19,800	16,090	10,490	10,380	7,030		8,490	5,820	(22.8)
-3.0 m (-9.8 ft)	kg		*7,020	4,850							
	lb		*15,480	10,690							

5.10 m (16' 9") Mono boom, 2.60 m (8' 6") arm equipped with 0.76 m³ (SAE heaped) bucket and dozer blade up.											
Load point height m (ft)	Load radius								At max. reach		
	3.0 m (9.8 ft)		4.5 m (14.8 ft)		6.0 m (19.7 ft)		7.5 m (24.6 ft)		Capacity		Reach
											m (ft)
7.5 m (24.6 ft)	kg		*4,190	*4,190					*3,450	*3,450	5.24
	lb		*9,240	*9,240					*7,610	*7,610	(17.2)
6.0 m (19.7 ft)	kg				*4,110	3,530			*3,000	*3,000	6.53
	lb				*9,060	7,780			*6,610	*6,610	(21.4)
4.5 m (14.8 ft)	kg		*4,820	*4,820	*4,310	3,460			*2,850	2,490	7.28
	lb		*10,630	*10,630	*9,500	7,630			*6,280	5,490	(23.9)
3.0 m (9.8 ft)	kg		*6,060	5,060	*4,830	3,310	3,550	2,330	*2,850	2,250	7.67
	lb		*13,360	11,160	*10,650	7,300	7,830	5,140	*6,280	4,960	(25.2)
1.5 m (4.9 ft)	kg		*7,280	4,710	4,870	3,150	3,490	2,270	*2,990	2,170	7.74
	lb		*16,050	10,380	10,740	6,940	7,690	5,000	*6,590	4,780	(25.4)
Ground	kg	*4,760	*4,760	7,350	4,510	4,750	3,040	*3,430	2,240	7.51	
Line	lb	*10,490	*10,490	16,200	9,940	10,470	6,700	*7,560	4,940	(24.6)	
-1.5 m (-4.9 ft)	kg	*8,980	8,350	7,300	4,470	4,710	3,010		3,850	2,490	6.95
	lb	*19,800	18,410	16,090	9,850	10,380	6,640		8,490	5,490	(22.8)
-3.0 m (-9.8 ft)	kg		*7,020	4,550							
	lb		*15,480	10,030							

1. Lifting capacity are based on ISO 10567.

2. Lifting capacity of the HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.
3. The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).

4. (\*) indicates load limited by hydraulic capacity.

STANDARD / OPTION

ENGINE	STD	OPT
Cummins QSB 6.7 engine	●	
HYDRAULIC SYSTEM		
<b>Intelligent Power Control (IPC)</b>		
3-power mode, 2-work mode, user mode	●	
Variable Power Control	●	
Pump Flow Control	●	
Attachment Mode Flow Control		●
Engine Auto Idle	●	
Engine Auto Shutdown Control		●
Electronic Fan Control	●	
20 km/h speed limit		●
Hyundai Bio Hydraulic Oil (HBHO)		●
CAB & INTERIOR		
<b>ISO Standard cabin</b>		
Rise-up type windshield wiper	●	
Radio / USB player	●	
Handsfree mobile phone system with USB	●	
12 volt power outlet (24V DC to 12V DC converter)	●	
Electric horn	●	
All-weather steel cab with 360° visibility	●	
Safety glass windows	●	
Sliding fold-in front window	●	
Sliding side window(LH)	●	
Lockable door	●	
Hot & cool box	●	
Storage compartment & Ashtray	●	
Transparent cabin roof-cover	●	
Sun visor	●	
Door and cab locks, one key	●	
Mechanical suspension seat with heater	●	
Pilot-operated slidable joystick	●	
Console box height adjust system	●	
<b>Automatic climate control</b>		
Air conditioner & heater	●	
Defroster	●	
Starting Aid (air grid heater) for cold weather	●	
<b>Centralized monitoring</b>		
8" LCD display	●	
Engine speed or Trip meter/ Accel.	●	
Engine coolant temperature gauge	●	
Max power	●	
Low speed/High speed	●	
Auto idle	●	
Overload	●	
Check Engine	●	
Air cleaner clogging	●	
Indicators	●	
ECO Gauges	●	
Fuel level gauge	●	
Hyd. oil temperature gauge	●	
Fuel warmer	●	
Warnings	●	
Communication error	●	
Low battery	●	
Clock	●	
Cabin lights		●
Cabin front window rain guard		●
Cabin roof-steel cover		●
<b>Seat</b>		
Adjustable air suspension seat with heater		●
<b>Cabin FOPS</b>		
FOPS (Falling Object Protective Structures) - ISO 10262 Level 2		●
<b>Cabin ROPS</b>		
ROPS (Roll Over Protective Structures)- ISO 12117-2	●	

SAFETY	STD	OPT
Battery master switch	●	
Rearview camera		●
AAVM (Advanced Around View Monitoring)		●
Four front working lights (2 boom mounted, 2 front frame mounted)	●	
Travel alarm		●
Rear work lamp		●
Beacon lamp		●
Automatic swing brake	●	
Boom holding system	●	
Arm holding system	●	
Safety lock valve for boom cylinder with overload warning device		●
Safety lock valve for arm cylinder		●
Swing Lock System		●
Four outside rearview mirror	●	
Genal Type Guardrail	●	
Separable Type Guardrail		●
OTHER		
<b>Booms</b>		
5.2 m (17' 1") Mono	●	
5.1 m (16' 9") 2-Piece		●
<b>Arms</b>		
2.2 m (7' 3")		●
2.6 m (8' 6")	●	
3.1 m (10' 2")		●
Removable clean-out dust net for cooler	●	
Removable reservoir tank	●	
Fuel pre-filter	●	
Fuel warmer	Single	●
	Dual	●
Self-diagnostics system	●	
Hi-mate (Remote Management System)	Mobile	●
	Satellite	●
	Dual	●
Batteries (2 x 12V x 100 AH)	●	
Fuel filler pump (50 L/min)		●
Single-acting piping kit (breaker, etc.)		●
Double-acting piping kit (clamshell, etc.)		●
Rotating Piping Kit		●
Quick coupler piping		●
Quick coupler		●
Accumulator for lowering work equipment	●	
Pattern change valve (2 patterns)		●
Fine Swing Control System		●
Tool kit		●
Auto cruiser system	●	
Travel pedal (2way)		●
LED lights on boom (2)		●
UNDERCARRIAGE		
Front blade		●
Front - grapple rest, Rear - blade		●
Rear - Dozer blade	●	
Rear - Outrigger		●
Front blade, Rear blade		●
Front outrigger and rear blade		●
Front and rear outrigger		●
Front blade and rear outrigger		●
Tires-dual (10.00-20-14PR tube)	●	
Tires-dual (10.00-20-16PR tube)		●
Tires-dual (10.00-20 solid)		●
Fenders (Mudguards)		●
Front grapple rest and rear blade with trailer fixture		●
Wide axle 2.7 m		●

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.  
The machine may vary according to International standards.  
\* The photos may include attachments and optional equipment that are not available in your area.  
\* Materials and specifications are subject to change without advance notice.  
\* All imperial measurements rounded off to the nearest pound or inch.