

# HX17AZ / HX19A

With EU Stage V Engine Installed



Head Office(Sales Office)  
14F, GLOBAL R&D CENTER, 477 BUNDANG SUSEO-RO, BUNDANG-GU, SEONGNAM-SI, GYEONGGI-DO, 13553, KOREA

PLEASE CONTACT

Engine Gross output (PS/kW)  
HX17AZ : 16.5(12.1) / HX19A : 16.5(12.1)

Operating weight (kg/lbs)  
HX17AZ : 1,850(4,080) / HX19A(Cabin) : 2,020(4,450)

# WHAT'S NEWEST AND BEST

HX17AZ / HX19A

## THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

- EU STAGE V / EPA Tier 4 Final Engine
- True Zero-tail (HX17AZ)
- Quick Coupler piping **Option**
- Boom swing function
- Long arm **Option**
- Additional counter weigh(HX17AZ) **Option**
- Retractable track & foldable dozer blade
- Double flange track roller

## EASY CONTROL AND COMFORTABLE OPERATION

- Digital Cluster **NEW**
- Centralized Switch Console
- Proportional joysticks **Option**
- Pattern Change Valve with Better Accesibility **Option**
- Improved Visibility
- Auto-Shift Travel Speed

## THE ULTIMATE SAFE ENVIRONMENT

- Emergency Engine Stop Switch
- Travel Alarm
- LED Work Light & Beacon Lamp **Option**
- Dozer Safety Valve **Option**
- Anti-theft System

## NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

- ROPS / OPG Cabin/Canopy **Option**
- Standard Boom/Arm/Bucket Cylinder Guard **NEW**
- New Designed Attachment for Durability
- Optimized Hydraulic Layout

## SERVICEABILITY AND TELEMATICS

- Hi MATE **NEW** **Option**



\* Photo may include optional equipment.



## EU STAGE V / EPA TIER 4 FINAL ENGINE

The new engine meets EU Stage V / EPA Tier 4 Final emission regulations without the need of special exhaust-after-treatment, resulting in reduced maintenance costs for after-treatment devices.



# THE BEST PRODUCTIVITY AND FUEL EFFICIENCY

HX A Series is equipped with eco-friendly, high-performance engines that meet the EU Stage V / EPA Tier 4 final emission requirements.

### True Zero-tail (HX17AZ)

HX17AZ eliminates the rear overhang, allowing the excavator to rotate freely within its own footprint. This feature enhances maneuverability and safety while minimizing the risk of damage to surrounding structures.

### Quick Coupler piping Option

The HX-A mini excavators are available with a factory-fitted hydraulic line to operate any hydraulic quick coupler. Thus allowing for quick changes of work tools, without having to leave the operator cabin.

### Boom swing function

The digging boom attached to the front frame can swing far to either side, thus increasing the machine reach. The front swing mechanism also allows working in difficult spaces (show image with boom swing angle to both sides)

### Long arm Option

Several dipper arm length options are available to perfectly adapt the machine for the required job.

### Additional counterweight Option

For increased stability when handling heavy loads the HX-A mini excavators can be fitted with an additional counterweight. (HX17AZ)

### Retractable track & foldable dozer blade

Retractable track and dozer offers versatility and efficiency when operator work in confined space.

### Double flange track roller

Double flange track roller provided improved track alignment, effectively preventing track derailment.



\* Photo may include optional equipment.



# NEW EXTERIOR DESIGN FOR ROBUSTNESS AND SAFETY

The true value of HX A Series lies in its durability and high productivity. The robust upper and lower frame structure can endure external shock and heavy work loads. Attachment performance has been proven through rigorous field testing. No matter how tough the working environment is, you can always rely on the HYUNDAI Excavator HX A Series.



\* Photo may include optional equipment.



## We make the best performance in rough working conditions without any unsureness with trustworthy HX17AZ/HX19A




HX A Series is equipment with eco-friendly, high-performance engines that meet the EU Stage V emission requirement. Become a true leader on the ground with HX A Series.

### \* ROPS Cabin and Canopy

The cabin structure of Hyundai HX A Series is using integrally welded low-stress, high strength steel to meet ROPS and FOG certification.

- ROPS : Roll-Over Protective Structures ISO12117-2
- OPG : Operator Protective Guard, ISO10262 **Option**

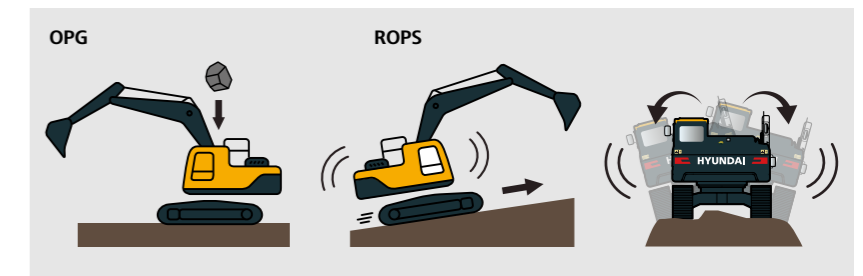

\* The cabin option is offered in HX19A only.

### Standard Boom/Arm/Bucket Cylinder Guard **NEW**

We have added new cylinder guards to the boom, arm, and bucket of our excavator to provide increased protection for the hydraulic cylinders. These guards effectively shield the cylinders from damage caused by debris and other external factors, reducing the risk of downtime and costly repairs.



### Improved Attachment Durability

Our upgraded attachments are designed to withstand the toughest work environments, featuring reinforced steel components and advanced welding techniques to ensure maximum strength and longevity.

### Optimized Hydarulic Hose Layout

Our new boom design ensures enhanced safety, durability, and performance by protecting the hose from collisions and external elements, while providing increased versatility and a cleaner operator workspace.



\* Photo may include optional equipment.



## EASY CONTROL AND COMFORTABLE OPERATION

Introducing our new Spacious & Comfortable Cabin The cabin has been designed with operator comfort and convenience in mind, with optimized ergonomics and advanced features that allow you to work with greater ease and efficiency. With its spacious interior and high-visibility design, our new cabin offers an unparalleled level of comfort and safety, ensuring that you can work for extended periods without fatigue or discomfort.

### Digital Cluster

New 5 inch LCD cluster of HX-A mini excavators allow you to easily control excavator setting - like Aux. flow rate adjustment. Our digital cluster also offers features for component lifecycle management and daily operation time management.



### Centralized Switch Console

HX-A mini excavators's console features a centralized layout with intuitive switches and controls that allow you to easily and quickly access all critical functions and operations.

### Proportional joysticks Option

Proportional control switch with better speed control helps operators to enlarge the operation convenience whenever they do time-consuming work.

### Pattern Change Valve Option

HX-A mini excavators now feature a pattern change valve conveniently located below cabin rubber pad, allowing for easy accessibility and operation.

### Improved Visibility

Experience a whole new level of visibility with our latest cabin design. Our engineers have worked tirelessly to enhance the visibility from the cabin, providing you with a wider and more expansive field of view. The new design allows for better sightlines in all directions, giving you a clear and unobstructed view of your surroundings.



### Auto-Shift Travel Speed

The auto shift travel speed feature on our excavator allows for seamless transitioning between high and low travel speeds, improving overall efficiency and productivity on the job site. This automated feature allows the operator to focus on the task at hand while the machine takes care of speed adjustments.



**HX17AZ/HX19A with advanced technology ensures our safety on a construction site.** //

**Emergency Engine Stop Switch**

With just a push of a button, the engine will immediately shut off, ensuring the safety of the operator and those around the machine.



**Travel Alarm**

The alarm emits a loud and distinct sound to notify nearby workers and pedestrians, reducing the risk of accidents and ensuring compliance with industry safety regulations.



**Work light & Beacon lamp** Option

HX-A mini excavators are equipped with powerful LED worklights & beacon lamp that provide excellent visibility in low-light conditions, ensuring safe and efficient operation at any time of day or night.



**Dozer Safety Valves** Option

The HX-A mini excavators is equipped with safety valve on dozer cylinder, which automatically activate in the event of hydraulic hose damage or loss of pressure to prevent sudden drops.

**Anti-theft System** Option

The system includes a password-protected ignition key to prevent the engine from starting without the correct key. Additionally, there is an optional GPS tracker (Hi MATE) available that allows you to quickly locate the machine in case of theft.



# THE ULTIMATE SAFE ENVIRONMENT

The true value of HX A Series lies in its durability. The robust frame structure and the attachments show the real value of HX A Series in tough working environments and promise higher productivity.



\* Photo may include optional equipment.



# SERVICEABILITY AND TELEMATICS

IoT / ICT / AI-based digital technology.  
Creating a smart construction site. Maximizes connectivity, productivity, and safety for successful businesses.



\* Photo may include optional equipment.

## HiMATE Option

### IT'S CONVENIENT, EASY AND VALUABLE

Hi MATE Hyundai's newly developed remote management system, utilizes GPS-satellite technology to provide customers with the highest level of service and product support available. Hi MATE enables users to remotely evaluate machine performance, access diagnostic information, and verify machine locations at the touch of a button.

### WHAT IS BENEFITS



#### Increase Productivity

It helps you operate machines in efficient. You can check the difference between total engine hours and actual working hours. See how productive your machines are and plan any required cost saving solutions. Hi MATE offers working information such as working / idling hours, fuel consumption and rate.



#### Convenient and Easy Monitoring

There is nothing much to do to monitor your machines. Just log on to the Hi MATE website or mobile application. Hi MATE allows you to watch your machines whenever and wherever you are.




#### Security

Protect your machines from theft or unauthorized usage with Hi MATE. If the machine moves out of the Geo-fence boundary, you will get alerts.

### Mobile Fleet App. Option

The new Mobile App is optimized to fleet management. It provides productivity, health insights based on telematics technology and enables fleet owner just focus on most wanted equipment in view of economical usage, utilization, fault codes and maintenance. The new Mobile App sorts equipment in order of eco-index, utilization-index and fault code level automatically so that urgent equipment pops up automatically.

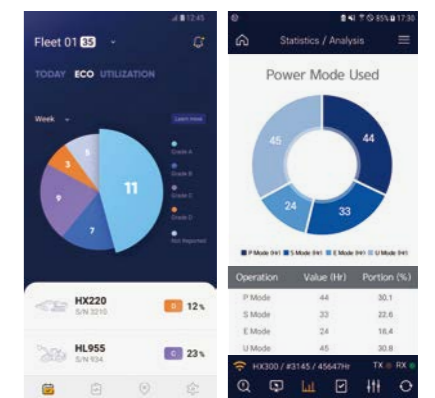

Hi MATE Fleet App

HCE-DT AIR App

# HX17AZ / HX19A SPECIFICATIONS


Unit : mm (ft-in)

| SPECIFICATIONS                           |                                   |                                                  |                                                  |
|------------------------------------------|-----------------------------------|--------------------------------------------------|--------------------------------------------------|
| Model                                    |                                   | HX17AZ                                           | HX19A                                            |
| Operating weight                         |                                   | kg(lbs)                                          | 1,850(4,080) / 2,020(4,450)                      |
| ENGINE                                   |                                   |                                                  |                                                  |
| Manufacturer                             |                                   | Kubota                                           | Kubota                                           |
| Model                                    |                                   | D902                                             | D902                                             |
| Type                                     |                                   | Vertical, water cooled 4-cycle IDI diesel engine | Vertical, water cooled 4-cycle IDI diesel engine |
| Emission standard                        |                                   | Tier 4 Final / Stage V                           | Tier 4 Final / Stage V                           |
| Gross                                    | PS(kW)/rpm                        | 16.5(12.1) / 2,400                               | 16.5(12.1) / 2,400                               |
| Net                                      | PS(kW)/rpm                        | 16.2(11.9) / 2,400                               | 16.2(11.9) / 2,400                               |
| Peak torque                              | Nm(lbft)                          | 54.6(40.3)                                       | 54.6(40.3)                                       |
| No. of cylinder                          |                                   | 3                                                | 3                                                |
| Bore x Stroke                            | mm(in.)                           | 72(2.83") x 73.6(2.90")                          | 72(2.83") x 73.6(2.90")                          |
| Displacement                             | cc(in <sup>3</sup> )              | 898(54.8)                                        | 898(54.8)                                        |
| HYDRAULIC SYSTEM                         |                                   |                                                  |                                                  |
| Pump type                                |                                   | Variable displacement tandem axis piston pumps   | Variable displacement tandem axis piston pumps   |
| Max. pressure                            | kgf/cm <sup>2</sup> (psi)         | 210(2,990)                                       | 210(2,990)                                       |
| Max. flow rate                           | l(gal)/min                        | 2 x 17.3(4.5) + 10.4(2.7)                        | 2 x 17.3(4.5) + 10.4(2.7)                        |
| Aux. flow rate (2way)                    | l(gal)/min                        | 27.7(7.3)                                        | 27.7(7.3)                                        |
| Fuel tank capacity                       | kgf/cm <sup>2</sup> (psi)         | 19.5(5.2)                                        | 21.3(5.6)                                        |
| Hydraulic tank capacity                  | l(gal)                            | 12.1(3.2)                                        | 20(5.3)                                          |
| Bucket digging force (ISO)               | kgf(lbf)                          | 1,664(3,668)                                     | 1,664(3,668)                                     |
| Arm digging force (ISO)                  | kgf(lbf)                          | 933(2,057)                                       | 933(2,057)                                       |
| Travel speed (high/low)                  | km(mile)/h                        | 4.1(2.6) / 2.2(1.4)                              | 3.7(2.3) / 2.1(1.3)                              |
| Traction force                           | kg(lb)                            | 1,420(3,130)                                     | 1,441(3,180)                                     |
| Swing speed                              | rpm                               | 9.2                                              | 9.2                                              |
| Boom length                              | mm(ft.)                           | 1.75(5.74)                                       | 1.75(5.74)                                       |
| Arm length                               | mm(ft.)                           | 1.03(3.38) / 1.23(4.04)                          | 1.03(3.38) / 1.23(4.04)                          |
| Bucket capacity, std. SAE                | m <sup>3</sup> (yd <sup>3</sup> ) | 0.04(0.05)                                       | 0.04(0.05)                                       |
| Bucket width (without / with sidecutter) | mm(in.)                           | 382(15") / 422(16.6")                            | 382(15") / 422(16.6")                            |
| Boom swing angle                         |                                   | LH 44° / RH 69°                                  | LH 55° / RH 59°                                  |
| Rubber track width                       | mm(ft.)                           | 230(9")                                          | 230(9")                                          |
| Ground pressure                          | kgf/cm <sup>2</sup> (psi)         | 0.31(4.38)                                       | 0.31(4.38)                                       |
| Noise level                              |                                   |                                                  |                                                  |
| LpA / LwA (2000/14/EC)                   | dB                                | 93 / N/A                                         | 92 / 75.3                                        |

\* All equipment dimension is based on standard boom/arm and counterweight.

# HX17AZ / HX19A WORKING RANGE & DIMENSION

## HX17AZ/HX19A DIMENSIONS

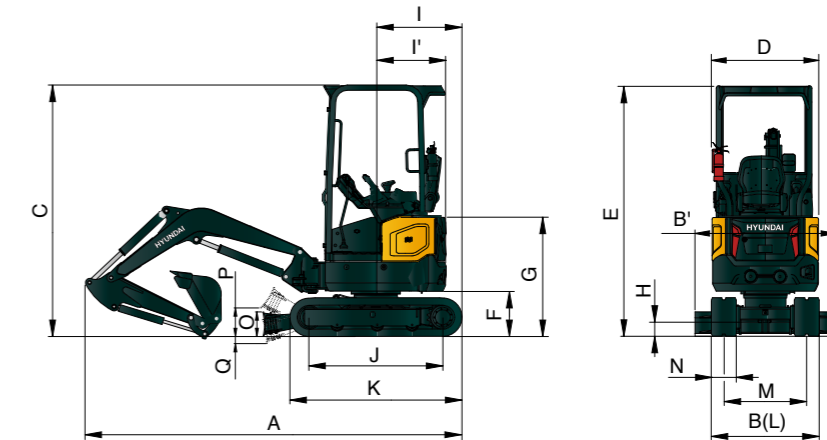


Unit : mm (ft-in)

|                                          | HX17AZ                     | HX19A                      |
|------------------------------------------|----------------------------|----------------------------|
| Operating weight (Canopy/Cabin)          | 1,850(4,080)               | 1,885/2,020(4,160/4,450)   |
| A Overall length                         | 3,531(11' 6")              | 3,837(12' 7")              |
| B Overall width                          | 994 ~ 1290 (3' 3" ~ 4' 3") | 994 ~ 1290 (3' 3" ~ 4' 3") |
| C Overall height                         | 2,320(7' 7")               | 2,275(7' 6")               |
| D Overall width of upperstructure        | 980(3' 3")                 | 980(3' 3")                 |
| E Overall height of cab                  | 2,320(7' 7")               | 2,275(7' 6")               |
| F Ground clearance of counterweight      | 415(1' 4")                 | 415(1' 4")                 |
| G Overall height of engine hood          | 1,095(3' 7")               | 1,240(4' 1")               |
| H Minimum ground clearance               | 150(0' 6")                 | 150(0' 6")                 |
| I Rear-end distance                      | 645(2' 1")                 | 1,065(3' 6")               |
| I' Rear-end swing radius                 | 645(2' 1")                 | 1,065(3' 6")               |
| J Distance between tumpers               | 1,230(4' 0")               | 1,230(4' 0")               |
| K Undercarriage length (without grouser) | 1,580(5' 2")               | 1,580(5' 2")               |
| L Undercarriage width                    | 994 ~ 1290 (3' 3" ~ 4' 3") | 994 ~ 1290 (3' 3" ~ 4' 3") |
| M Track gauge                            | 764 ~ 1060 (2' 6" ~ 3' 6") | 764 ~ 1060 (2' 6" ~ 3' 6") |
| N Track shoe width, standard             | 230(0' 9")                 | 230(0' 9")                 |
| O Height of blade                        | 225(0' 9")                 | 225(0' 9")                 |
| P Ground clearance of blade up           | 183(0' 7")                 | 183(0' 7")                 |
| Q Depth of blade down                    | 222(0' 9")                 | 222(0' 9")                 |

Unit : mm (ft-in)

## HX17AZ/HX19A WORKING RANGE

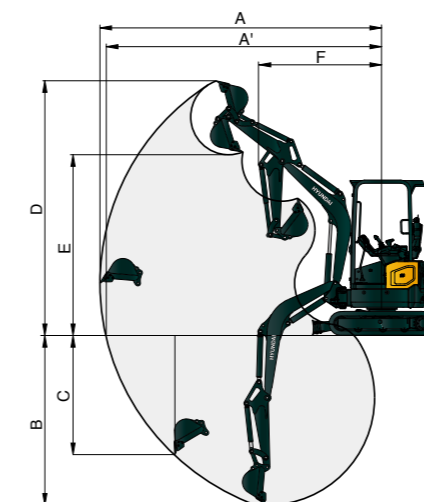

| momel                              | HX17AZ         | HX19A          |
|------------------------------------|----------------|----------------|
| A Max. digging reach               | 3,910(12' 10") | 3,940(12' 11") |
| A' Max. digging reach on ground    | 3,820(12' 6")  | 3,850(12' 8")  |
| B Max. digging depth               | 2,240(7' 4")   | 2,340(7' 8")   |
| B' Max. digging depth (8' level)   | 1,600(5' 3")   | 1,740(5' 9")   |
| C Max. vertical wall digging depth | 1,750(5' 9")   | 1,840(6' 0")   |
| D Max. digging height              | 3,730(12' 3")  | 3,470(11' 5")  |
| E Max. dumping height              | 2,670(8' 9")   | 2,440(8' 0")   |
| F Min. swing radius                | 1,580(5' 2")   | 1,725(5' 8")   |

# LIFTING CAPACITY

Rating over-front Rating over-side or 360 degree

## HX17AZ

Boom : 1.75 m (5' 9") / Arm : 1.03 m (3' 5") / Dozer blade up : 230mm(9") rubber track

| Lift-point height (m/ft) |    | Lift-point radius |       |                |     |                |     | At max. reach |       |        |
|--------------------------|----|-------------------|-------|----------------|-----|----------------|-----|---------------|-------|--------|
|                          |    | 2.0 m (6.6 ft)    |       | 2.5 m (8.2 ft) |     | 3.0 m (9.8 ft) |     | Capacity      | Reach |        |
|                          |    |                   |       |                |     |                |     |               |       |        |
| 3.0m                     | kg | *390              | *390  |                |     |                |     | *410          | *410  | 2.18   |
| 9.8 ft                   | lb | *860              | *860  |                |     |                |     | *900          | *900  | (7.2)  |
| 2.5m                     | kg |                   |       | *370           | 360 |                |     | 320           | 300   | 2.74   |
| 8.2 ft                   | lb |                   |       | *820           | 790 |                |     | 710           | 660   | (9.0)  |
| 2.0m                     | kg | *380              | *380  | 370            | 350 | 270            | 260 | 260           | 250   | 3.07   |
| 6.6 ft                   | lb | *840              | *840  | 820            | 770 | 600            | 570 | 570           | 550   | (10.1) |
| 1.5m                     | kg | *510              | 490   | 360            | 340 | 270            | 260 | 230           | 220   | 3.27   |
| 4.9 ft                   | lb | *1,120            | 1,080 | 790            | 750 | 600            | 570 | 510           | 490   | (10.7) |
| 1.0m                     | kg | 490               | 460   | 350            | 330 | 260            | 250 | 220           | 210   | 3.36   |
| 3.3 ft                   | lb | 1,080             | 1,010 | 770            | 730 | 570            | 550 | 490           | 460   | (11.0) |
| 0.5m                     | kg | 470               | 440   | 340            | 320 | 260            | 250 | 220           | 210   | 3.36   |
| 1.6 ft                   | lb | 1,040             | 970   | 750            | 710 | 570            | 550 | 490           | 460   | (11.0) |
| 0.0m                     | kg | 460               | 430   | 330            | 310 | 250            | 240 | 230           | 220   | 3.26   |
| 0.0ft                    | lb | 1,010             | 950   | 730            | 680 | 550            | 530 | 510           | 490   | (10.7) |
| -0.5m                    | kg | 450               | 420   | 330            | 310 | 250            | 240 | 250           | 240   | 3.05   |
| -1.6 ft                  | lb | 990               | 930   | 730            | 680 | 550            | 530 | 550           | 530   | (10.0) |
| -1.0m                    | kg | 460               | 430   | 330            | 310 |                |     | 300           | 280   | 2.70   |
| -3.3 ft                  | lb | 1,010             | 950   | 730            | 680 |                |     | 660           | 620   | (8.9)  |
| -1.5m                    | kg | 470               | 440   |                |     |                |     | *430          | 410   | 2.11   |
| -4.9 ft                  | lb | 1,040             | 970   |                |     |                |     | *950          | 900   | (6.9)  |


## HX19A - CANOPY

Boom : 1.75 m (5' 9") / Arm : 1.03 m (3' 5") / Dozer blade up : 230mm(9") rubber track

| Lift-point height (m/ft) |    | Lift-point radius |        |                |      |                |     | At max. reach |       |        |
|--------------------------|----|-------------------|--------|----------------|------|----------------|-----|---------------|-------|--------|
|                          |    | 2.0 m (6.6 ft)    |        | 2.5 m (8.2 ft) |      | 3.0 m (9.8 ft) |     | Capacity      | Reach |        |
|                          |    |                   |        |                |      |                |     |               |       |        |
| 2.5m                     | kg |                   |        | *370           | *370 |                |     | *350          | 350   | 2.77   |
| 8.2 ft                   | lb |                   |        | *820           | *820 |                |     | *770          | 770   | (9.1)  |
| 2.0m                     | kg |                   |        | *380           | *380 | 320            | 310 | 300           | 290   | 3.10   |
| 6.6 ft                   | lb |                   |        | *840           | *840 | 710            | 680 | 660           | 640   | (10.2) |
| 1.5m                     | kg | *510              | *510   | 420            | 400  | 320            | 300 | 270           | 260   | 3.30   |
| 4.9 ft                   | lb | *1,120            | *1,120 | 930            | 880  | 710            | 660 | 600           | 570   | (10.8) |
| 1.0m                     | kg | 570               | 540    | 410            | 390  | 310            | 300 | 260           | 250   | 3.39   |
| 3.3 ft                   | lb | 1,260             | 1,190  | 900            | 860  | 680            | 660 | 570           | 550   | (11.1) |
| 0.5m                     | kg | 550               | 510    | 400            | 380  | 300            | 290 | 250           | 240   | 3.39   |
| 1.6 ft                   | lb | 1210              | 1,120  | 880            | 840  | 660            | 640 | 550           | 530   | (11.1) |
| 0.0m                     | kg | 530               | 500    | 390            | 370  | 300            | 290 | 260           | 250   | 3.29   |
| 0.0ft                    | lb | 1,170             | 1,100  | 860            | 820  | 660            | 640 | 570           | 550   | (10.8) |
| -0.5m                    | kg | 530               | 500    | 380            | 360  | 300            | 290 | 290           | 280   | 3.08   |
| -1.6 ft                  | lb | 1,170             | 1,100  | 840            | 790  | 660            | 640 | 640           | 620   | (10.1) |
| -1.0m                    | kg | 540               | 510    | 390            | 370  |                |     | 340           | 330   | 2.73   |
| -3.3 ft                  | lb | 1,190             | 1,120  | 860            | 820  |                |     | 750           | 730   | (9.0)  |
| -1.5m                    | kg | *500              | *500   |                |      |                |     | *430          | *430  | 2.14   |
| -4.9 ft                  | lb | *1,100            | *1,100 |                |      |                |     | *950          | *950  | (7.0)  |

1 | Lifting capacity are based on ISO 10567.  
 2 | Lifting capacity of HX Series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.  
 3 | The Lift-point is bucket pivot mounting pin on the arm(without bucket mass).  
 4 | (\*) indicates load limited by hydraulic capacity.

Unit : mm (ft.-in)



# STANDARD / OPTION

● : Standard / ○ : Option

## ENGINE

| Model                               | HX17AZ | HX19A |
|-------------------------------------|--------|-------|
| Mechanical controlled Kubota engine | ●      | ●     |
| Double-element air filter           | ●      | ●     |
| Water separator with filter         | ●      | ●     |

## HYDRAULIC SYSTEM

|                                       |   |   |
|---------------------------------------|---|---|
| Open center hydraulic system          | ● | ● |
| Two-speed travel with auto-shift      | ● | ● |
| Pressure accumulator                  | ○ | ○ |
| Proportional Aux. control             | ○ | ○ |
| 1 way Aux. hydraulic line for breaker | ● | ● |
| 2 way Aux. hydraulic line for grapple | ● | ● |
| Adjustable Aux. flow on cluster       |   | ● |
| Pattern change valve                  |   | ○ |

## CABIN & CANOPY

|                                                 |   |   |
|-------------------------------------------------|---|---|
| Canopy                                          | ● | ● |
| Cabin with heater                               |   | ○ |
| ROPS (Roll-over Protective structure, ISO3471)  | ● | ● |
| OPG (Operator Protective Guard) Level 1         | ○ | ○ |
| Adjustable Mechanical Suspension Seat           | ● | ● |
| Travel levers                                   | ● |   |
| Travel levers with foot pedals                  |   | ● |
| Emergency hammer for exit                       |   | ● |
| Power-assisted front window                     |   | ○ |
| Travel alarm                                    | ● | ● |
| LED beacon lamp                                 | ○ | ○ |
| 5" Digital cluster with IP67 water & dust proof | ● | ● |
| Radio with USB                                  |   | ○ |
| 12V power socket                                | ● | ● |
| Side & Rear Mirrors                             |   | ● |
| Cup holder                                      | ● | ● |
| Horn                                            | ● | ● |

## WORKING EQUIPMENT

|                                       |   |   |
|---------------------------------------|---|---|
| Zero-tail                             | ● |   |
| Boom swing function                   | ● | ● |
| Arm with thumb bracket                | ○ | ○ |
| Long arm option                       | ○ | ○ |
| Hyundai quick coupler                 | ○ | ○ |
| Quick coupler piping                  | ○ | ○ |
| Additional counter weight option      | ○ |   |
| Safety valves for Dozer               | ○ | ○ |
| Travel & Swing motor with discs brake | ● | ● |
| 1 halogen work light on boom          | ● | ● |
| 1 halogen work light on cabin         |   | ○ |
| 1 LED work light on boom              | ○ | ○ |
| 1 LED work lights on cabin            |   | ○ |

## UNDERCARRIAGE

| Model                                         | HX17AZ | HX19A |
|-----------------------------------------------|--------|-------|
| Retractable undercarriage with foldable dozer | ●      | ●     |
| Rubber track                                  | ●      | ●     |
| Hi-Mate                                       | ○      | ○     |

\* Standard and optional equipment may vary. Contact your Hyundai dealer for more information.  
 \* The machine may vary according to International standards.  
 \* The photos may include attachments and optional equipment that are not available in your area.  
 \* Materials and specifications are subject to change without advance notice.  
 \* All imperial measurements rounded off to the nearest pound or inch.

